



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Signed

Dated 14 June 2001

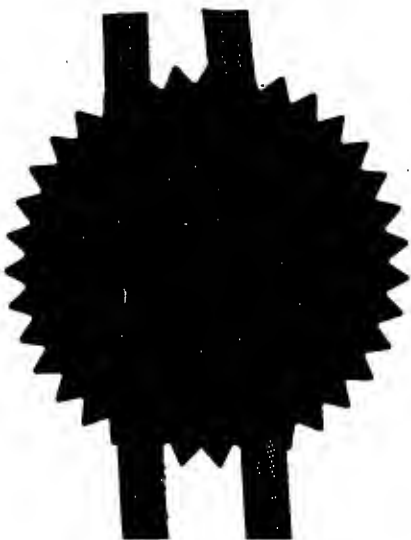

Request for grant of a patent  
Grant

The Patent Office  
Concept House  
Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference

2034-P570-GB

2. Patent application number

0109626.2

NEW

3. Full name, address and postcode of the or of  
each applicant (*underline all surnames*)

DISCREET LOGIC INC  
10 Duke Street  
Montreal, Quebec  
Canada  
H3C 2L7

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the  
country/state of its incorporation

Quebec, Canada

4. Title of the invention

Generating Three Dimensional Text

5. Name of your agent

ATKINSON BURREINGTON

"Address for service" in the United  
Kingdom to which all correspondence  
should be sent

25-29 President Buildings  
President Way  
Sheffield S4 7UR  
GB

Telephone No:

0114 275 2400

Patents ADP number

7807043001

6. If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of  
these earlier applications and (*if you know  
it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day/month/year*)

N/A

N/A

N/A

7. If this application is divided or otherwise  
derived from an earlier UK application,  
give the number and the filing date of  
the earlier application

Number of earlier application

Date of filing  
(*day/month/year*)

N/A

N/A

8. Is a statement of inventorship and of right  
to grant of a patent required in support of  
this request?

Yes

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

33 ✓

Claim(s)

07 ✓

Abstract

01 ✓

Drawings

20 + 20

RW

10. If you are also filing any of the following, state how many against each item.

Priority documents

N/A

Translations of priority documents

N/A

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

None ✓

Request for preliminary examination and search (*Patents Form 9/77*)

One ✓

Request for substantive examination (*Patents Form 10/77*)

None

Any other documents  
(Please specify)

11.

I/We request the grant of a patent on the basis of this application.



Signature

Date Wednesday, 18 April 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

RALPH ATKINSON CPA  
0114 275 2400

## Generating Three Dimensional Text

### Background of the Invention

#### 5 1. Field of the Invention

The present invention relates to generating three-dimensional text within images composited in real time.

#### 2. Description of the Related Art

10 Systems are known with which to generate three-dimensional text characters. According to the prior art, said text characters can be represented as a three-dimensional geometric model including polygons constructed from vertices defined by three-dimensional co-ordinates. Alternatively, any of said text character may be used to derive a set of curves defining the outline of  
15 said character. This set of curves is transformed into a set of polygons and said set of polygons may be created by converting said curves into sets of connected line segments and then tessellating the polygon defined by said line segments.

Regardless of the method employed to confer image depth to said text  
20 characters, as well as of the various three-dimensional spatial transformations, lighting effects and other colourisations which are also well known to those skilled in the art, these text character graphic objects are traditionally transferred to a graphics processor to be manipulated by an animator or editor in order to produce an image that can be further  
25 processed, ie integrated into a film or video broadcast.

Therefore, it can be said that three-dimensional characters generated according to the prior art require an editor to be aware of the contents of the image and/or broadcasts within which said three-dimensional text will be implemented, in order to accurately define, transform and render said three-dimensional text. According to said prior art, the contents of said graphical titles always have to be known in advance of the filming of the video sequence, as every successive instantiation of said titles, corresponding to successively changing text contents, has to be designed and rendered in order to ensure that it conforms to position and size imperatives when overlaid onto each frame of the broadcast, thereby precluding live broadcast from benefiting from said three-dimensional text titling effects.

The present invention overcomes this problem by providing a two-dimensional template defined within a three-dimensional space which formats text according to three-dimensional properties such that said text can be rendered as three-dimensional text in real-time.

### **Brief Summary of the Invention**

According to a first aspect of the present invention, there is provided an apparatus for generating three-dimensional text within images composited in real time, comprising means for generating said three-dimensional text from one or a plurality of text formatting templates, including processing means and storage means. Said storage means stores said text formatting templates and instructions for said processing means. Said instructions configure said processing means to perform the steps of defining one of said text formatting templates as a two-dimensional template equipped with cartesian co-ordinates within a three-dimensional

space; equipping said defined text formatting template with three-dimensional preferences with which to format text to be included in said template; equipping said defined text formatting template with said text and rendering said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space.

According to a second aspect of the present invention, there is provided a method for generating three-dimensional text within images composited in real time, by means of generating said three-dimensional text from one or a plurality of text formatting templates. Storage means stores said text formatting templates and instructions for processing means. Said instructions configures said processing means to perform the steps of defining one of said text formatting templates as a two-dimensional template equipped with cartesian co-ordinates within a three-dimensional space; equipping said defined text formatting template with three-dimensional preferences with which to format text to be included in said template; equipping said defined text formatting template with said text and rendering said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space.

### **Brief Description of the Several Views of the Drawings**

*Figure 1* shows a computer editing system, including a computer system video display unit and a broadcast-quality monitor;

*Figure 2* details the typical hardware components of the computer editing system shown in *Figure 1*;

*Figure 3* illustrates the contents of the main memory shown in *Figure 2*;

*Figure 4* details the actions performed at the computer editing system by the 3-D text application shown in *Figure 3*, according to the invention;

5        *Figure 5* shows the graphical user interface of the 3-D text application shown in *Figures 3* and *4*, including a visualisation window;

*Figure 6* details the actions performed at the computer editing system shown in *Figure 1* in order to define the 3-D template properties shown in *Figure 4*;

10        *Figure 7A* shows a two-dimensional 3-D text template instantiated within a 3-D space within a visualisation window shown in *Figure 5*;

*Figure 7B* shows the two-dimensional 3-D text template shown in *Figure 7A* rotated in two dimensions within said 3-D space;

15        *Figure 7C* shows the two-dimensional 3-D text template shown in *Figure 7A* rotated in three dimensions within said 3-D space;

*Figure 7D* shows the two-dimensional 3-D text template shown in *Figure 7B* scaled within said 3-D space;

*Figure 8* shows the graphical user interface of *Figure 5* including a two-dimensional 3-D text template as detailed in *Figures 7A* to *7D*;

20        *Figure 9* details the actions performed by the 3-D text applications shown in *Figures 3* and *4* in order to define the 3-D text properties in the 3-D text template;

*Figure 10A* shows a string of text characters equipped with a font and a font size;

25        *Figure 10B* shows the string of text characters shown in *Figure 10A* equipping the two-dimensional 3-D text template as shown in *Figure 8*;

*Figure 10C* shows the string of text characters shown in *Figure 10B* equipped with extrusion parameters and a texture;

*Figure 10D* illustrates the string of text characters as shown in *Figure 10C* equipped with lighting properties;

5        *Figure 11* shows the graphical user interface of *Figure 8* including a two-dimensional 3-D text template and 3-D text as detailed in *Figures 10A* to *10D*;

10        *Figure 12* details the actions performed by the 3-D text application shown in *Figures 3* and *4* in order to write the properties of the 3-D text template shown in *Figure 11*;

*Figure 13* shows the GUI of the 3-D text application shown in *Figure 3* when the 3-D text template properties and the 3-D text properties within said template are retrieved according to the invention;

15        *Figure 14* shows the 3-D text rendered within the application GUI shown in *Figure 13* according to the invention;

*Figure 15* shows the 3-D text shown in *Figure 14* rendered with other three-dimensional objects according to the invention;

*Figure 16* shows a frame of the live broadcast shown in *Figure 1* composited with 3-D text according to the invention.

20        *Figure 17* shows the GUI as shown *Figure 15* when the string of text characters is changed;

*Figure 18* shows the frame as shown in *Figure 16* when the string of text characters changed in *Figure 17* is rendered.



### Best Mode for Carrying Out the Invention

A computer editing system, including a computer system video display unit and a broadcast-quality monitor, is shown in *Figure 1*.

#### 5 *Figure 1*

In the system shown in *Figure 1*, instructions are executed upon an IBM Compatible Personal Computer or an Apple Macintosh. However, depending upon the level of processing required and the size of images being considered, large graphics-based processing system may be used, such as an ONYX II manufactured by Silicon Graphics Inc.

The processing system **101** receives instructions from an operator by means of a stylus **102** supplied to a touch tablet **103**, in response to visual information received by means of a visual display unit **104**. In addition, data may be supplied by the operator via a keyboard **105** or a mouse **106**, with input source material being received via a real-time digital video recorder or similar equipment configured to supply high bandwidth frame data.

The processing system **101** includes internal volatile memory in addition to bulk randomly accessible storage, which is provided by means of a RAID disk array **107**. Output material may also be viewed by means of a high quality broadcast monitor **108**. System **101** includes a CD ROM reader **109** to allow executable instructions to be read from an instruction carrying medium in the form of a CD ROM **110**. In this way, executable instructions are installed on the computer system for subsequent execution by the system. System **101** also includes an external medium reader **111** to allow object properties and data to be written to an instruction or data carrying medium in the form of a floppy disk **112**.

The internal architecture for the processing system 101 is shown in *Figure 2*.

***Figure 2***

5 The system includes a central processing unit 201 which fetches and executes instructions and manipulates data. Frequently accessed instructions and data are stored in a high-speed cache memory 202. Said central processing unit 201 is connected to a system bus 203. System bus 203 provides connectivity with a larger main memory 204, which requires  
10 significantly more time for the CPU to access than the cache 202. The main memory 204 contains between one hundred and twenty-eight and two hundred and fifty-six megabytes of dynamic random access memory. A hard disk drive (HDD) 205 provides non-volatile bulk storage of instructions and data. A graphics card 206 receives graphics data from the CPU 201, along  
15 with graphics instructions and supplies graphical data to visual display unit 104 and broadcast-quality monitor 108. The I/O device 207 or universal serial bus 208 receive input commands from stylus 102 and tablet 103, keyboard 105 and mouse 106. The external medium drive 111 is primarily provided for the writing of data, such as sets of ASCII characters corresponding to data  
20 generated by means of stylus 102, tablet 103, keyboard 105 and mouse 106 to floppy 112, and CD-ROM drive 109 is provided for the loading of executable instructions stored on CD-ROM 110 to the hard disk drive 205. A network card 209 provides connectivity to the RAID array 107.

A summary of the contents of the main memory 204 of the system 101  
25 is shown in *Figure 3*, as subsequently to the loading of instructions according to the present invention.

**Figure 3**

Main memory 204 includes primarily an operating system 301, which is preferably Microsoft Windows 2000 or LINUX as said operating systems are considered by as those skilled in the art to be particularly stable when using computationally intensive applications. Main memory 204 also includes a 3-D text application 302, which provides the operator of system 101 with means with which to visualise ASCII characters inputted by means of keyboard 105 and display said ASCII input onto visual display unit 104.

Main memory 204 includes one or a plurality of 3-D text templates 303 according to the invention, an object database 304, object meshes 305 and object textures 306. Main memory 204 finally includes user data 307.

The successive operations required to generate three-dimensional text according to the invention are detailed in *Figure 4*.

**Figure 4**

At step 402, the system 101 is switched on. The instructions corresponding to the 3-D text application 302 are subsequently loaded at step 402 from CD ROM 110.

At step 403, a question is asked as to whether an existing 3-D template should be retrieved for compositing purposes. If the question of step 403 is answered positively, the 3-D text application 302 loads the 3-D text template 303 from the hard disk drive 205 or the floppy disk 112 in conjunction with objects database 304, wherein said template 303 is referenced, and control is directed to step 407. Alternatively, if the question of step 403 is answered negatively, then at step 404 a default 3-D text template 303 is defined and equipped with properties within a three-dimensional

space. At step **405**, the text which will be equipping said 3-D text template **303** is defined and equipped with properties within said template. Upon completing the successive defining operations at step **404** and **405**, the resulting final properties are eventually written as a 3-D text template **303** referenced within objects database **304** and likely to be retrieved according to step **403** at a later session of application **302**.

At step **407**, a string of characters is inputted by means of keyboard **105** into the objects database **304** and is subsequently rendered at step **408** according to the definitions and properties of steps **404** to **406**.

A question is asked at step **409** as to whether the string of character inputted at step **407** requires amending, for instance if the broadcast requires multiple titles rendered identically or, if the string of characters inputted at step **407** contained a spelling or grammatical error. If the question of step **409** is answered positively, then control is returned to step **407**, wherein a new string of characters can be inputted or the existing character string can be edited. Alternatively, if the question asked at step **409** is answered in the negative, the system **101** is eventually switched off at step **410**.

An example of the graphical user interface (GUI) of the 3-D text application **302** displayed on the output monitor **104** is shown in *Figure 5*.

### **Figure 5**

The GUI **501** divides the display area of output monitor **104** into multiple windows. A first of said windows is a visualisation window **502**, within which the respective results of operations performed according to steps **403** to **408** are previewed at various levels of rendering quality. Said various levels range from wireframe quality, i.e. vectored lines, to fully-rendered

quality, i.e. said vectored lines onto which textures, lighting and a plurality of visual editing effects which will be further detailed in the present embodiment are implemented. In the example, a three-dimensional space is visualised with reference to a width abscissa **503**, a depth abscissa **504** and a height ordinate **505**.

A second window **506** displays the contents of the page of the objects database **304** relating to the specific template **303** being edited. Said page includes an object number referencing column **507**, an object referencing column **508**, an object type column **509**, an object value column **510** and a timecode display column **511**. Depending upon the object selected, not every object requires a type and/or value.

According to the invention, each entry in each of said columns may be selected for editing by means of stylus **102** and tablet **103**, keyboard **105**, or mouse **106** or a combination thereof, and new windows may be generated for said editing purpose within the GUI **501** depending upon the type of object selected, as will be detailed and shown further in the present embodiment.

In the example, a new 3-D text template requires creating and 3-D text application **302** thus generates a new page in the object database **304** with a default 3-D text template **303**. Said default template is rendered within window **502** as a two-dimensional template object **512**, the cartesian co-ordinates of two opposite corners **513** and **514** of which are overlayed in said window **502**. Corner **513** is located at the origin of the three-dimensional space and thus its cartesian co-ordinates are (0, 0, 0). Conversely, corner **514** is diagonally opposite to corner **513** and is thus equipped with width and height co-ordinates and, in the example, said cartesian co-ordinates are (10, 5, 0).

The various steps required in order to define a two-dimensional template and equip said template with properties within the three-dimensional space shown in window 502 at step 403 are further detailed in *Figure 6*.

5     **Figure 6**

At step 601, the 3-D text application 302 instantiates a three-dimensional space equipped with an origin, a width 503, a height 505 and a depth 505, such that any object placed within said three-dimensional space can be accurately located by means of (x, y, z) cartesian co-ordinates.

10       At step 602, 3-D text template 303 is instantiated as a two-dimensional template object 512 within said three-dimensional space. That is, said template is a surface delimited by a width and a length but it is not equipped with any depth yet. At step 603, a question is asked as to whether the template instantiated at step 602 must be rotated in order to be satisfactorily  
15       positioned within the three-dimensional space. If the question asked at step 603 is answered negatively, control is directed to step 605. Alternatively, if the question asked at step 603 is answered positively, then at step 604 a rotation angle is inputted as an angular value or the template object 512 itself is rotated within the three-dimensional space by means of mouse 106 or a  
20       combination of stylus 102 and table 103. The rotating operation carried out at step 604 can be carried out within a two-dimensional plane and thus the template rotates within the same plane as is defined by its surface, or said rotation may be free-form within the three-dimensional space and, at this stage, confers a depth property to the template.

25       At step 605 a question is asked as to whether the template object requires scaling, i.e. the standard surface of said template object 512 when it

is instantiated at step 602 must be increased or decreased. If the question asked at step 605 is answered negatively, control is directed to step 607. Alternatively, if the question asked at step 605 is answered positively, at step 606 a scaling percentage is input by means of keyboard 105, or the template object 512 is scaled by means of mouse 106 or a combination of stylus 102 and tablet 103.

At step 607, the final (x, y, z) cartesian co-ordinates of two opposite corners 513, 514 of the template object 512 are written in the 3-D text template 303 properties. At step 608, the template behaviour pattern is chosen amongst three specific modes.

The fixed mode locks the cartesian values written at step 607 and, upon equipping the 3-D text template with text, said fixed mode also locks all attributes of said text such that it places a limit on the length of the character string displayable by said template.

Alternatively, the wrap mode only locks the width of the template as the only constraint, such that a string of characters inputted in said template beyond the total width of said template will be rendered on a new lower line below the first line of said character string, akin to a carriage return taking place.

Finally, the stretch mode selectable at step 608 confers dynamism to the 3-D text template, characterised in that the surface of said 3-D text template increases in direct proportion to the content, i.e. the length, of the string of characters. The cartesian values written at step 607 are uniformly increased such that corners 513, 514 extend away from one another and thus increase the surface they define.

Upon inputting the template behaviour at step 608, the chosen page mode is written in the 3-D text template properties at step 609. The template object 512 instantiated at step 602 within a three-dimensional space instantiated at step 601 in the visualisation window 502 is shown in greater detail in *Figure 7A*.

### **Figure 7A**

In order to accurately locate and position the template object 512 within the three-dimensional space, the 3-D text application 302 references two opposite corners 513 and 514 of the surface delimited by template. As it is known that corners 513 and 514 each represent the intersection at a right angle of two strictly perpendicular lines and that at least one line of one of said sets is known to be strictly parallel to another line in the opposite set, the 3-D text application 302 automatically computes the remaining two corners of template object 512. The benefit of referencing template object 512 by means of two corners as opposed to four is to minimise the amount of data required in order to define template object 512 within the 3-D space.

As the volume instantiated at step 601 is three-dimensional, the two corners 513, 514 of template object 512 are thus equipped with respective cartesian co-ordinates 701, 702 that allows the 3-D text application 302 to accurately position said points in relation to the width 503, depth 504 and height 505 of said three-dimensional space. As the template object 512 is initially instantiated as a two-dimensional object, said points 513 and 514 are only equipped with length and height co-ordinates and their respective depth co-ordinate is null. In the example, as it was previously explained, the cartesian co-ordinates 701 of corner 513 are (0,0,0) and the cartesian co-



ordinates **702** of corner **513** are (10,5,0), with said co-ordinates values given sequentially as width, height and depth.

The template object **512**, after being instantiated at step **602**, can subsequently be rotated at step **604** either within a two-dimensional plane or within the three-dimensional space. Said template object **512** is shown in *Figure 7B* equipped with a rotation within two-dimensions only.

### **Figure 7B**

In the example, the template object **512** is rotated by an angle **711** within the plane delimited by the width abscissa **503** and the height co-ordinate **505**. The respective cartesian co-ordinates **701**, **702** of corners **513** and **514** therefore still do not include a depth value. However, even if said respective cartesian values **701**, **702** of said corners **513** and **514** included a depth value, if said depth value is strictly identical in both sets of co-ordinates, said depth value translates the fact that the surface defined by said two corners **513**, **514** is strictly parallel to the width abscissa **503** and the height ordinate **505**, and strictly perpendicular to the depth abscissa **504** and thus, template object **512** is still positioned within a two-dimensional plane within the three-dimensional space. In the example, the two-dimensional rotation is carried out as the lower right-hand corner **712** of template object **512** is chosen as the centre of rotation, or origin of the angle **711**. Said centre of rotation can be arbitrarily positioned within the three-dimensional space and will be easily implemented by those skilled in the art. After template object **512** is rotated by angle **711**, the cartesian co-ordinates **701**, **702** of corners **513**, **514** are respectively (0,2,0) and (8,4,0).

Alternatively, the 3-D text templates **512** is shown in *Figure 7C* rotated within the three-dimensional space.

**Figure 7C**

5           In addition to the rotation within a two-dimensional plane, corners **513** and **514** are respectively given differing depth value. In effect, template object **512** rotates relative to corner **712** as the point of origin of the rotation angle **711** and also rotates relative to the median axis **721** of the two-dimensional surface delimited by template object **512** according to the rotation angle **722**.  
10           Consequently, the respective cartesian co-ordinates **701**, **702** of corner **513** and corner **514** now vary to a fairly large extent. In the example, after the template object **512** is rotated by angles **711** and **722**, corner **513** has cartesian co-ordinate values **701** of (1, 5, 5) and corner **514** has cartesian co-ordinate values **702** of (9, 2, 4).

15           Two-dimensional and three-dimensional rotation of objects, whether said objects are themselves two-dimensional or three-dimensional, should be easily implemented by those skilled in the art. According to the invention, template object **512** can be further defined according to step **606**, wherein it can be scaled, ie the total surface delimited by the four corners of template  
20           object **512** can be increased or decreased. The template object **512** is shown in *Figure 7D* scaled within the 3-D space instantiated at step **512**.

**Figure 7D**

25           In the example, the template does not require two-dimensional or three-dimensional rotation but the operator or system **101** is aware that further three-dimensional objects will require implementing within the three-

dimensional space and thus template object 512 requires additional depth. The "depth" cartesian value of corners 513 and 514 is therefore implemented in such a way that it is identical for each respective corner. In the example, the default respective cartesian values 701, 702 of corner 513 and corner 514 were (0, 0, 0) and (10, 5, 0) thus a depth value of '3' is added, such that said respective cartesian values 701, 702 of corner 513 and corner 514 are now (0, 0, 3) and (10, 5, 3).

According to the present invention, it is also known to the user of system 101 that the standard surface of template object 512, upon its instantiation, is too large and must be decreased. Consequently, said user inputs a scaling percentage or clicks with mouse 106 or stylus 102 and table 103 on said template object 512, or a corner thereof and subsequently reduces the total surface of template object 512 in such a way that each corner of template object 512 is brought closer to the imaginary centre 731 of the surface delimited by template object 512 by an identical ratio, known to those skilled in the art as the aspect ratio. Inversely, if the total surface of template object 512, upon its instantiation, was too small then the scaling operation would inverse the previous mechanism and the four corners of said template object 512 would extend away from said imaginary centre 731 of the surface delimited by template object 512 by an identical ratio also known to those skilled in the art as said aspect ratio. In the example, as template object 512 is scaled, the respective cartesian co-ordinates 701, 702 of corners 513 and 514 are amended by means of the aspect ratio to (3,2,3) and (8,3,3).

An example of the graphical user interface (GUI) of the 3-D text application 302 displayed on the output monitor 104 subsequently to the

operations performed according to steps **601** to **609** and further detailed in *Figures 7A to 7D* is shown in *Figure 8*.

**Figure 8**

5           The results of operations performed according to steps **601** to **609** are previewed at wireframe quality, i.e. vectored lines, within the visualisation window **502**. Dotted lines **801** link the corners **513**, **514** to the width abscissa **503**, the depth abscissa **504** and the height ordinate **505** within the three-dimensional space so as to visualise the respective positions of said corners  
10           relative to said abscissas and ordinate, in addition to the overlayed cartesian co-ordinates **701**, **702**. Said rotating and scaling operations according to steps **603** to **606** can be performed either by means of clicking with mouse **106** or a combination of stylus **102** with tablet **103** onto template object **512** within window **502** and accomplishing said operations by means of motions  
15           applied to said input means or, alternatively, clicking with mouse **106** or a combination of stylus **102** with tablet **103** onto the 'template' entry **802** in object referencing column **508** within window **506**.

          Upon clicking on said 'template' entry **802**, a third window **803**, also known to those skilled in the art as a 'drop-down' menu, displays the  
20           properties of the template object **512** within the three-dimensional space, which are stored in the main memory **204** as part of the 3-D text template **303** being edited. Said properties include a template properties referencing column **804** and a template property value column **805**. Said properties refer to rotating, scaling and page behaviour operations according to steps **603**  
25           through to **609**. According to the invention, each entry in said property value column **804** may be selected for editing by means of stylus **102** and tablet

103, keyboard 105, or mouse 106 or a combination thereof.

In the example, the 3-D text template object 303 is defined and its properties are amended as was previously explained in *Figure 7D*. Accordingly, the value of the two-dimensional rotation property is null, as no rotation is required at all for the purpose intended. The value of the scaling property is 'seventy-five percent', indicating that the default surface of the template object 512 was uniformly reduced by 25%. The page behaviour mode selected according to step 608 is 'fixed' mode, as the text to be inputted in template object 303 must appear strictly identical at all times for the purpose intended, and thus the value of the behaviour property is 'fixed'.

Referring back to *Figure 6*, the 3-D text template 303 is now fully defined by means of its properties and the final cartesian co-ordinates 701, 702 within the three-dimensional space. Further to the definition of the 3-D text template, the text which will be contained within said template must now also be defined with properties according to step 405. The corresponding actions performed by the 3-D text applications 302 in order to define the 3-D text properties in the 3-D text template are detailed in *Figure 9*.

### **Figure 9**

At step 901, a font is chosen with which to format the text which will be inputted in the 3-D text template as a string of ASCII characters. Said font identifies a specific shape with which to format the standard ASCII characters and is well known to those skilled in the art. Many different types of fonts exists, one of which is particularly well known to those skilled in the art as "True Type Font". Upon choosing an appropriate font at step 901, a font size is indicated at step 902. Said font size defines the size with which to render

every inputted ASCII character according to the font chosen at step **901**, and is traditionally expressed as the number of dots, or pixels, with which to model said ASCII character. Formatting operations performed according to steps **901** and **902** are typical text formatting operations carried out within a two-dimensional plane, such as within a word processor.

A string of ASCII characters is shown in *Figure 10A* equipped with a font and a font size. The string of ASCII characters "ABC123" **1001** is shown within a two-dimensional plane defined by the width abscissa **503** and the height ordinate **504**.

#### **Figure 10A**

Referring back to *Figure 9*, at step **903**, the shape of every ASCII character formatted according to the font and size respectively chosen at steps **901** and **902** and shown in *Figure 10A* are vectorised, ie every outline of said shape is divided into a number of vertices such that said outline is divided into a number of segments. As the vectorisation of the shape completes, the vectorised shape is then tessellated into a number of polygons, with said number of polygons depending upon the final rendering resolution.

The string of ASCII characters **1001** equipped with a font and a font size is shown in *Figure 10B*. As the properties of two-dimensional 3-D text template **303** were set according to step **404**, the string of ASCII characters "ABC123" **1001** is previewed in the rendered template object **512** defined within the three-dimensional space defined by the width abscissa **503**, the height ordinate **505** and the depth abscissa **504**. The vectorization and tessellation operations of step **903** are then implemented for the purpose of

previewing the string **1001** within the visualisation window **502** and rendering said string upon completing the formatting operations according to steps **404** to **407**. Said previewed string **1001** is thus now equipped with a depth value **1011** equal to the depth value of template object **512**.

5

### **Figure 10B**

Referring back to *Figure 9*, a question is asked at step **904** which asks whether an extrusion operation should be performed on the three-dimensional text. If the question of step **904** is answered negatively, control is directed to the next question at step **906**. Alternatively, if the question of step **904** is answered positively, then an extrusion operation is required, which increases the thickness of the three-dimensional text. In effect, a copy of the vertices defined within the two-dimensional plane defined by the template object **512** is created and offset along an axis strictly perpendicular to the surface of the template by a distance equal to the extrusion value, and implemented along an axis strictly parallel to the existing template. The respective vertices contained within the first template **512** and the copies thereof are subsequently linked by means of individual lines strictly parallel to the depth abscissa **504** and the surface said parallel joining lines define are subsequently tessellated into polygons. According to the invention, the extrusion depth may be input within windows **506** by means of keyboard **105** or within windows **502** by means of miles **106** or a combination of stylus **102** and tablet **103**.

10

15

20

25

The string of ASCII characters **1001** equipped with a depth is shown in *Figure 10C*. The string of ASCII characters "ABC123" **1001** is shown within the template object **512** and extruded by a depth value of 'one' in the

example. Consequently, the vertices defining the outlines of the ASCII characters within string 1001 are copied and said copied vertices 1021 are offset by a depth value of 'one' along an axis 1022 strictly parallel to the depth abscissa 504 and strictly perpendicular to the height ordinate 505 and the width abscissa 503. If the template object 512 was rotated either in a two-dimensional plane or within the three dimensional space, the vertices would be offset along an axis strictly perpendicular to either of the median axes 721, 1023 of template object 512 and subsequently aligned so that the vectored outlines they define are strictly parallel to the vectored outlines within said template object 512.

### ***Figure 10C***

Referring back to *Figure 9*, a question is asked at step 906 as to whether the 3-D text should be rendered with a specific texture. If the question at step 906 is answered negatively, then control proceeds to the next and last question at step 908. Alternatively, if the question of step 906 is answered positively, then a texture 306 is referenced with which to equip the polygons which define the 3-D text. Said texture is traditionally a bitmap file which is applied to the surface of said polygons so as to provide any three-dimensional object with volume and density.

At step 908, a final question is asked as to whether the textured 3-D text requires an artificial light source. If the question of step 908 is answered positively, artificial lighting properties are inputted which traditionally include the cartesian co-ordinates of the light source itself within the three-dimensional space, the intensity of the light source expressed as a percentage of the default ambient light within the three-dimensional space



and the colour of said artificial light. Artificial lighting of three-dimensional objects within a three-dimensional space will be easily implemented by those skilled in the art, along with further refinements of the operation performed at step 909, such as multiple artificial light sources, adjustable radiosity and luminosity and light diffusion type and others, all of which are also claimed by the present invention.

### **Figure 10D**

The string of ASCII characters 1001 equipped with an extrusion 1021 is shown in *Figure 10D*. In the example, the artificial light source 1041 is equipped with cartesian co-ordinate values 1042 of (6, 4, 10) within the three dimensional space, such that it is more or less centrally positioned in front of template object 512. Said artificial light source is oriented towards the template object 512 and is given an arbitrary brightness of one hundred and twenty-five percent, i.e. twenty-five percent brighter than the ambient light within the three-dimensional space. The 3-D text application 302 subsequently computes the surfaces 1043 which are artificially brightened and the surfaces 1044 which are artificially shadowed. Said surfaces are composed of polygons, the extremities of which are the vertices of vectorized and tessellated ASCII characters 1001 and the extruded vertices 1021 of vectorized and tessellated ASCII characters 1001.

### **Figure 11**

The results of operations performed according to steps 601 to 609 and subsequently according to steps 901 to 909 are previewed at an intermediate quality, i.e. wherein the polygons of the wireframe of each ASCII character

within template object 512 are textured and lighted at an intermediate resolution, within the visualisation window 502. According to the invention, any of the formatting operations performed according to steps 601 to 609 and subsequently 901 to 909 may be previewed within window 502 at a minimum  
5 wireframe rendering quality or at a maximum resolution rendering quality or any rendering level comprised within said minimum and maximum levels, depending upon the configuration of the system 101.

The font selection and font size selection operations according to steps 901 to 902 can be performed either by means of clicking with mouse  
10 106 or a combination of stylus 102 with tablet 103 onto template object 512 within window 502 and accomplishing said operations by means of motions applied to said input means or, alternatively, clicking with mouse 106 or a combination of stylus 102 with tablet 103 onto the 'text' entry 1101 in object  
15 referencing column 508 within window 506. In order to visualise the forthcoming formatting operations according to steps 904 through to 909, a temporary string 'LLLNNN' 1102 is inputted by means of keyboard 105 into the object value column 510 relating to the 'text' entry 1101 in object  
referencing column 508. Upon inputting the string, said string 1102 is rendered within the template object 512 within window 502 as vectorized and  
20 tessellated 3-D text 1103.

Upon clicking on said 'text' entry, a third window 1104 displays the properties of the 3-D text 1103 rendered within the template object 512, which are stored in the main memory 204 as part of the 3-D text template 303 being edited, the properties of which were defined at steps 601 to 609.  
25 Said properties include a text properties referencing column 1105 and a text property value column 1106. Said properties refer to extrusion, texture and

lighting operations according to steps 904 through to 909. According to the invention, each entry in said property value column 1105 may be selected for editing by means of stylus 102 and tablet 103, keyboard 105, or mouse 106 or a combination thereof.

5 In the example, the 3-D text 1103 within the 3-D text template 303 is defined and its properties are amended as was previously explained in *Figures 10C and 10D*. Accordingly, the value of the extrusion property is one. The value of the texture property is 'steel', indicating that all the polygons of 3-D text 1103 are to be overlayed with a bitmap image configured to represent a steel aspect.

10 The value of the light source's brightness selected according to step 909 is 125%, as was previously explained. Dotted lines 1107 link the artificial light source 1041 to the width abscissa 503 and the depth abscissa 504 within the three-dimensional space, in addition to the overlayed cartesian co-ordinates 1042. Upon completing the definition of the artificial lighting, the complete set of 3-D text formatting properties may now be appended to the properties of the 3-D text template 303 according to step 406, which is further detailed in *Figure 12*.

## 20 *Figure 12*

Depending upon the level of proficiency of the user of system 101 in defining a 3-D text template 303 and formatting 3-D text therein, many successive attempts at finalising the respective properties thereof may be required. Therefore, a question is asked at step 1201 as to whether the 3-D text template 303 previewed as template object 512 equipped with formatted 3-D text 1103 within window 502 is acceptable for its intended purpose in its

current configuration. If the question at step 1201 is answered negatively, then at step 1202 the 3-D text template properties are amended according to operations performed at steps 603 through to 609 or, alternatively, the 3-D text formatting properties are amended according to operations performed at steps 901 through to 909. According to the invention, the respective formatting properties of the 3-D text template and the 3-D text can be amended independently from one another, by means of alternatively selecting the "template" entry 802 in the object referencing column 508 so as to amend the template properties and selecting the "text" entry 1101 in said object referencing column 508 in order to amend the text properties. Upon completing the amendments at step 1202, control is returned to the question of step 1201, wherein said amendments are again previewed and assessed until such time as the question of step 1201 is answered positively and control is subsequently directed to step 1203.

At said step 1203, the 3-D text template 303 is named as a template type 805 in object type column 509 by system 101's user in order to reference said template as a specifically defined template, as opposed to a default template, which may therefore be retrieved at step 403 at a later session of 3-D text application 302.

Said template type 805 is an arbitrary string of alpha numerical characters and, in the example shown, the user intends to use said template to display three capital letters and three numbers, thus the template is give the type "LLLNNN". At step 1204, the 3-D text template 303 properties, including the 3-D text formatting properties, are written in an internal medium, such as hard disk drive 205, or an external medium such as floppy disk 112, or a combination thereof.

At step 1205, the specific template is referenced in object database 304 by means of the type 805 which uniquely identifies said specific template 303 amongst any other default or specific template contained therein.

Referring back to *Figure 4*, if the question asked at step 403 in order to determine if an existing template, ie a specific template, should be retrieved is answered positively then 3-D text application 302 prompts the user of system 101 for the template reference and, upon retrieving the properties of said specific template, 3-D text application 302 subsequently displays said specific template within GUI 501 according to said properties. A GUI 501 wherein a specific template according to the invention is displayed is shown in *Figure 13*.

### ***Figure 13***

As previously detailed, the GUI 501 divides the display area of output monitor 104 into multiple windows. The visualisation window 502 shows the wireframe outline 512 of the 3-D text template 303 defined within the three-dimensional space according to the properties retrieved at step 403 and/or the properties written at step 406.

The second window 506 displays the contents of the page of the objects database 304 relating to the specific template 303. Said specific template is an object amongst a plurality of potential objects within the three dimensional space and is thus referenced as the first 1301 of said objects within the three dimensional space in column 507, as a template 1302 in column 508, and as the specific template to be equipped with three letters and three numbers 'LLLNNN' 1303 in column 509.

No value is required in column **510**, as template **303** is an object which does not contain an overall value-driven property. However, the timecode **1304** '0:00:00:01' expressed as minutes, seconds, tenths of seconds and individual frames in column **511** indicates that template **303** is to be rendered in the first possible frame after video-synchronisation with the broadcast shown in real-time in high-quality monitor **108**.

In a preferred embodiment of the present invention, a third window **1305**, which is another visualisation window, is displayed within GUI **501**. Said window shows the template object **512** rendered in two dimensions only, for the purpose of editing the ASCII characters which will equip template **303** and verify the correct text content and formatting of the template before it is rendered at step **408**. It can be observed that the entry in the value column **510** corresponding to the text object is empty and so windows **502** and **1305** only display the wireframe outline **512** of 3-D text template.

The 3-D text template **303** according to the invention is therefore retrieved and rendered, and includes text formatting properties such that any string of ASCII characters inputted in the value column **510** corresponding to the text object is rendered within said template according to said formatting properties, thus is rendered in three dimensions. Said 3-D text rendering is further detailed in *Figure 14*.

#### **Figure 14**

It was previously explained that each entry in columns **507** to **511** may be selected for editing by means of stylus **102** and tablet **103**, keyboard **105**, or mouse **106** or a combination thereof.

Therefore, according to the present invention, upon selecting the entry 1401 in the value column 510 corresponding to the text object and inputting a string of ASCII characters "ABC123" 1402 by means of keyboard 105, said string 1402 is immediately rendered as three-dimensional text 1403 within the template object 512 within windows 502 and 1305 according to the 3-D text properties contained within 3-D text template 303.

It was previously mentioned that additional three-dimensional objects may be implemented within the three-dimensional space within which template object 512 is located. Said implementation of additional objects is shown in *Figure 15*.

### ***Figure 15***

The 3-D text template is defined within the three-dimensional space and is a two-dimensional object within said space. Said space may include further two- or three-dimensional objects in addition to said template and, in the example, the topic of the broadcast to be equipped with the titling composited according to the invention is global. An 'earth' object is thus implemented by system 101's user, which consists of a globe made of polygons, known to those skilled in the art as a mesh, overlayed with a texture depicting a geographical map of the world.

Said implementation requires the initial referencing of said 'earth' object in the second window 506. The 'earth' object is equipped with a unique reference (1501) within referencing column 507, to differentiate it from the 3-D template and the ASCII string within database 304. The 'earth' object is subsequently identified within referencing column 508 as globe 1502. The standard mesh 305 stored in the main memory 204 which is used to build the

'earth' object is then pointed at by means of the mesh designation **1503**, i.e. a three-dimensional volume bounded by surfaces tessellated into polygons within type column **509**. The mesh is scaled to 25% of its default size in order to fit the design requirements of the composited template, and thus its value is inputted as 25% (**1504**) within value column **510**. Finally, the timecode **1505** '0:00:00:01' expressed as minutes, seconds, tenths of seconds and individual frames in column **511** indicates that the 'earth' object is to be rendered in the first possible frame after video-synchronisation with the broadcast shown in real-time in high-quality monitor **108**, similarly to the 3-D template.

As the 'earth' object is now defined within the three-dimensional space, its implementation also requires the referencing of the texture **306** to be applied onto the corresponding mesh **1503** in the second window **506**. The 'earth' texture is equipped with a unique reference (**1506**) within referencing column **507**, to differentiate it from the 3-D template, the ASCII string and the earth object's mesh within database **304**. The 'earth' texture is subsequently identified within referencing column **508** as a texture **1507**. The 'earth' object is then typified as a bitmapped texture **1508**, i.e. a two-dimensional image constructed from individual pixels, within type column **509**. In order to differentiate the texture to be applied to the 'earth' object from any other texture **306** stored in main memory **204**, the bitmap filename is inputted as its value (**1509**) within value column **510**. Finally, the timecode **1510** '0:00:00:01' expressed as minutes, seconds, tenths of seconds and individual frames in column **511** indicates that the 'earth' texture is to be applied to the 'earth' object for rendering in the first possible frame after video-synchronisation with the broadcast shown in real-time in high-quality



monitor 108, similarly to the 3-D template.

As properties of the new 'earth' object are inputted and subsequently written within objects database 304, said 'earth' object is rendered within window 502 according to the level of rendering quality indicated for preview as a three-dimensional model 1511. In the example, said preview rendering quality is indicated as good, and a fully-rendered 'earth' object 1511 is rendered within window 502 in conjunction with the template object 512 and 3-D text 1403.

As previously explained, window 1305 only shows the template 303 rendered in two dimensions for the purpose of editing the ASCII characters which equip template 303 and verify the correct text content and formatting of the template before it is fully rendered at step 408. The 'earth' object 1511 is thus not rendered within said window 1305.

In the example, the 3-D template 303 is now ready for titling the broadcast shown in monitor 108. A frame of the broadcast which is titled in real-time with a 3-D template according to the invention is shown in *Figure 16*.

### ***Figure 16***

System 101 is configured to equip a live video broadcast with computer-generated graphical titles. Consequently, upon obtaining a satisfying preview in window 502 on VDU 104, system 101 user instructs 3-D text application 302 to equip the next frame 1601 of the video footage broadcast in real-time with the composited title 1602 comprising 3-D text template 303 equipped with the 'ABC123' string of ASCII characters 1402 inputted at step 407 and rendered at step 408 according to the 3-D text template properties retrieved at step 403 or written at step 406, and other

three-dimensional objects referenced within the same page of the objects database 304 as said template 303, such as the 'earth' object 1511.

In the example, a presenter 1603 is reading news in front of a blue screen according to the prior art, such that a static or moving background image may be overlayed, along with the title 1602 according to the invention.  
5 The next available frame displayed by broadcast-quality monitor 108 therefore shows a presenter 1603 along with said title 1602, as said 3-D template according to the invention is rendered in real-time.

In the example, a new information develops during the live broadcast  
10 and the text value 1402 within the 3-D template 303 in title 1602 requires editing and rendering in real-time as said information develops. The editing of the text contents of the 3-D template within title 1602 is shown in *Figure 17*.

### ***Figure 17***

15 As the new information develops and the text contents within the 3-D template require editing in real-time to reflect the changes in the information, according to the present invention, upon selecting the entry 1401 in the value column 510 corresponding to the text object and inputting a new string of ASCII characters "DEF456" 1701 to replace the previous string of ASCII  
20 characters "ABC123" 1402 by means of keyboard 105, said string 1701 is immediately rendered as three-dimensional text 1702 within the template object 512 within windows 502 and 1305 according to the 3-D text properties contained within 3-D text template 303. Accordingly, the title 1602 is rendered with the new three-dimensional text 1702 as said rendering occurs in real-  
25 time according to the invention.

A frame titled in real-time with a 3-D template according to the invention is shown in *Figure 18*, which is subsequent to the previous frame of the broadcast shown in *Figure 16*, wherein the text which equipped the 3-D template rendered in said previous frame has been edited in real-time.

5     **Figure 18**

3-D text application 302 equips the next frame 1801 of the video footage broadcast in real-time with the composited title 1802 comprising 3-D text template 303 equipped with the 'DEF456' string of ASCII characters 1701 inputted at step 407 and rendered at step 408 according to the 3-D text template properties retrieved at step 403 or written at step 406, and other three-dimensional objects referenced within the same page of the objects database 304 as said template 303, such as the 'earth' object 1511.

The next available frame displayed on broadcast-quality monitor 108 therefore shows the same presenter 1603 along with the composited title 1802, as said 3-D template according to the invention is rendered in real-time.

Alternatively, 3-D text application 302 equips the next frame 1801 of the video footage broadcast in real-time with the composited title 1802 comprising 3-D text template 303 equipped with any string of ASCII characters inputted at step 407 and rendered at step 408 according to the 3-D text template properties retrieved at step 403 or written at step 406, and other three-dimensional objects referenced within the same page of the objects database 304 as said template 303, such as the 'earth' object 1511.

In a preferred embodiment of the present invention, the 3-D text application 302 can be linked to any real-time information database known to those skilled in the art, such that said link configures the selection and edition

of the entry **1401** in the value column **510** corresponding to the text object to automatically update said entry **1401** upon the contents of said information database being updated in real-time. The three-dimensional text generated in real-time from said entry **1401** is therefore updated accordingly and the  
5 corresponding title **1802** dynamically reflects updates of said real-time information database.

## Claims

1. Apparatus for generating three-dimensional text within images composited in real time, comprising means for generating said three-dimensional text from one or a plurality of text formatting templates, including processing means and storage means, wherein

said storage means stores said text formatting templates and instructions for said processing means;

said instructions configure said processing means to perform the steps of:

defining one of said text formatting templates as a two-dimensional template equipped with cartesian co-ordinates within a three-dimensional space;

equipping said defined text formatting template with three-dimensional preferences with which to format text to be included in said template;

equipping said defined text formatting template with said text; and

rendering said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space.

2. Apparatus according to claim 1, wherein said one or a plurality of text formatting templates is a two-dimensional plane delimited by two sets of two parallel segments of an identical length, the respective extremities of the segments of the first set intersecting the respective extremities of the segments of the second set at a right angle.

3. Apparatus according to claims 1 and 2, wherein said defining step of one of said text formatting templates as a two-dimensional template equipped with cartesian co-ordinates within a three-dimensional space comprises either a two-dimensional rotation, or a three-dimensional rotation, or a scaling operation or any combination thereof.

4. Apparatus according to claim 3, wherein said two-dimensional rotation, three-dimensional rotation and scaling operation are implemented either by motion input or alphanumerical input or any combination thereof.

5. Apparatus according to claim 1, wherein said three-dimensional preferences with which to format text to be included in said template comprises either an extrusion depth, or one or a plurality of textures with which to equip said text, or one or a plurality of light sources with which to light said text, or any combination thereof.

6. Apparatus according to claim 5, wherein said extrusion depth, one or a plurality of textures with which to equip said text and one or a plurality of light sources with which to light said text are implemented either by motion input or alphanumerical input or any combination thereof.

7. Apparatus according to claim 1, wherein said text is one or a plurality of ASCII characters equipped with a font and font size, every outline of which is subsequently divided into a number of vertices, such that said every outline is divided into a number of segments that are tessellated into a number of polygons, with said number of polygons depending upon the final

rendering resolution.

8. Apparatus according to claim 1, wherein said text equipping  
said defined text formatting template is alphanumerical data inputted either  
by means of physical input means or by means of a data source linked to  
said text formatting template.

9. Apparatus according to claim 1, wherein said equipping step  
of said defined text formatting template with said text is performed in real  
time.

10. Apparatus according to claim 1, wherein said rendering step  
of said two-dimensional template including said text formatted according to  
said three-dimensional preferences within said three-dimensional space is  
performed in real time.

11. A method of generating three-dimensional text within images  
composited in real time, comprising means for generating said three-  
dimensional text from one or a plurality of text formatting templates,  
including processing means and storage means, wherein

said storage means stores said text formatting templates and  
instructions for said processing means;

said instructions configure said processing means to perform the  
steps of:

defining one of said text formatting templates as a two-dimensional  
template equipped with cartesian co-ordinates within a three-dimensional

space;

equipping said defined text formatting template with three-dimensional preferences with which to format text to be included in said template;

- 5           equipping said defined text formatting template with said text; and  
          rendering said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space.

- 10           **12.** A method according to claim 11, wherein said one or a plurality of text formatting templates is a two-dimensional plane delimited by two sets of two parallel segments of an identical length, the respective extremities of the segments of the first set intersecting the respective extremities of the segments of the second set at a right angle.

- 15           **13.** A method according to claims 11 and 12, wherein said defining step of one of said text formatting templates as a two-dimensional template equipped with cartesian co-ordinates within a three-dimensional space comprises either a two-dimensional rotation, or a three-dimensional  
20           rotation, or a scaling operation or any combination thereof.

- 14.** A method according to claim 13, wherein said two-dimensional rotation, three-dimensional rotation and scaling operation are implemented either by motion input or alphanumerical input or any  
25           combination thereof.



15. A method according to claim 11, wherein said three-dimensional preferences with which to format text to be included in said template comprises either an extrusion depth, or one or a plurality of textures with which to equip said text, or one or a plurality of light sources  
5 with which to light said text, or any combination thereof.

16. A method according to claim 15, wherein said extrusion depth, one or a plurality of textures with which to equip said text and one or a plurality of light sources with which to light said text are implemented  
10 either by motion input or alphanumerical input or any combination thereof.

17. A method according to claim 11, wherein said text is one or a plurality of ASCII characters equipped with a font and font size, every outline of which is subsequently divided into a number of vertices, such that said  
15 every outline is divided into a number of segments that are tessellated into a number of polygons, with said number of polygons depending upon the final rendering resolution.

18. A method according to claim 11, wherein said text equipping  
20 said defined text formatting template is alphanumerical data inputted either by means of physical input means or by means of a data source linked to said text formatting template.

19. A method according to claim 11, wherein said equipping step  
25 of said defined text formatting template with said text is performed in real time.

20. A method according to claim 11, wherein said rendering step of said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space is performed in real time.

5

21. A computer-readable medium having computer-readable instructions executable by a computer such that, when executing said instructions, a computer will perform the steps of

defining a text formatting template as a two-dimensional template  
10 equipped with cartesian co-ordinates within a three-dimensional space;

equipping said defined text formatting template with three-dimensional preferences with which to format text to be included in said template;

equipping said defined text formatting template with said text; and  
15 rendering said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space.

22. A computer-readable memory system having computer-readable data stored therein, comprising

one or a plurality of textures;  
one or a plurality of object meshes;  
an objects database;  
one or a plurality of 3D text templates; and  
25 a 3D text application with which to define, configure and render said 3D text templates.

23. A computer-readable memory system according to claim 22, wherein said program instructions are configured to;

define a text formatting templates as a two-dimensional template equipped with cartesian co-ordinates within a three-dimensional space;

5 equip said defined text formatting template with three-dimensional preferences with which to format text to be included in said template;

equip said defined text formatting template with said text; and

render said two-dimensional template including said text formatted according to said three-dimensional preferences within said three-dimensional space.

10

**Abstract of the Disclosure****3D Text Objects**

A method and apparatus are provided for generating three-dimensional text **1403** within images **1601** composited in real time, by means of generating three-dimensional text **1403** from one or a plurality of text formatting templates **303**. Storage means **204** stores said text formatting templates **303** and instructions **302** for processing means **201**, **202**. Said instructions **302** configure said processing means **201**, **202** to define **(404)** a text formatting template **512**. Said instructions **302** further configure said processing means **201**, **202** to equip **(405)** said defined text formatting template **512** with three-dimensional preferences with which to format text **1402** to be included in said template and subsequently equip **(407)** said defined text formatting template **512** with said text **1402**. Said instructions **302** finally configure said processing means **201,202** to render **(408)** said two-dimensional template **512** including said text **1403** formatted according to said three-dimensional preferences **(1602)**.

*(Figure 4)*

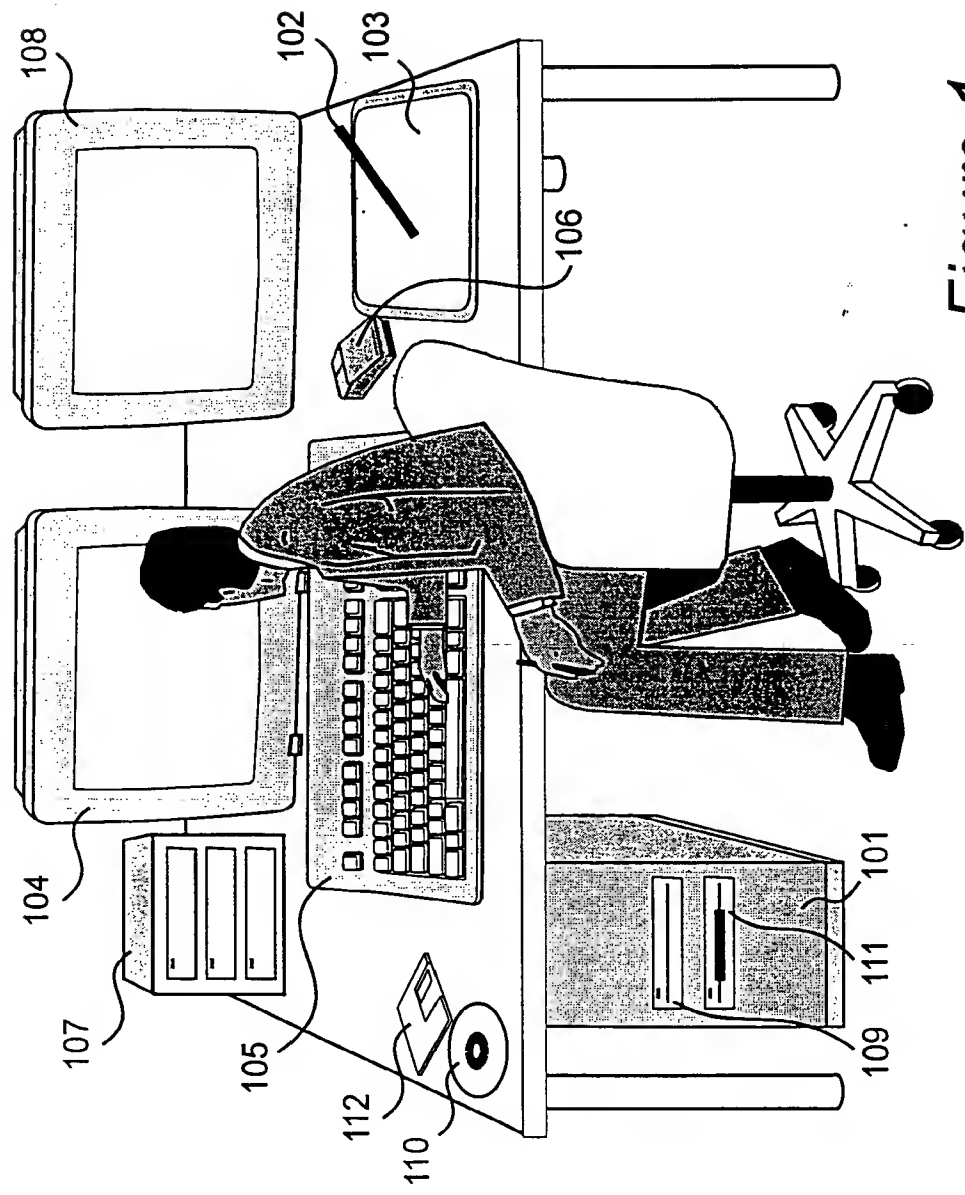
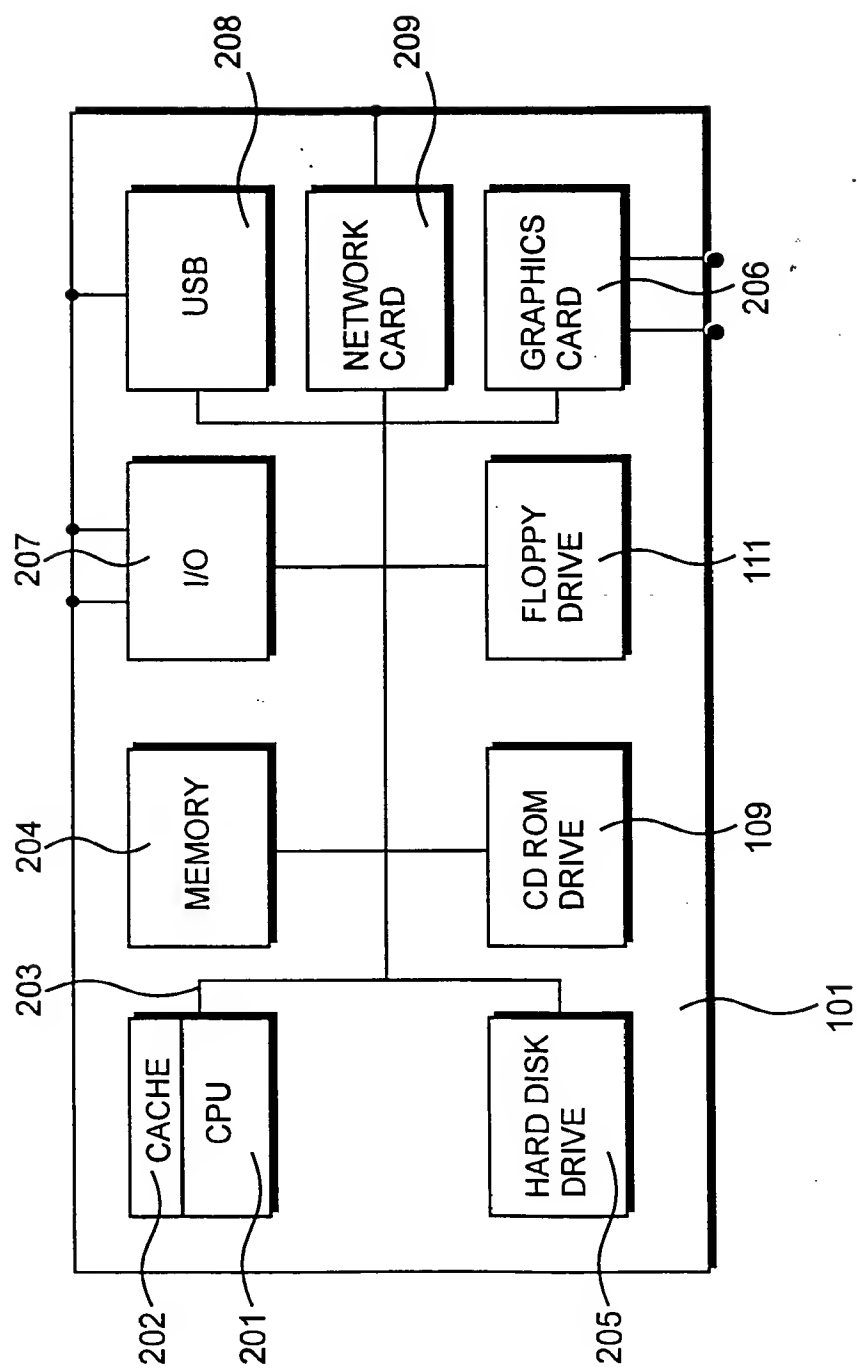
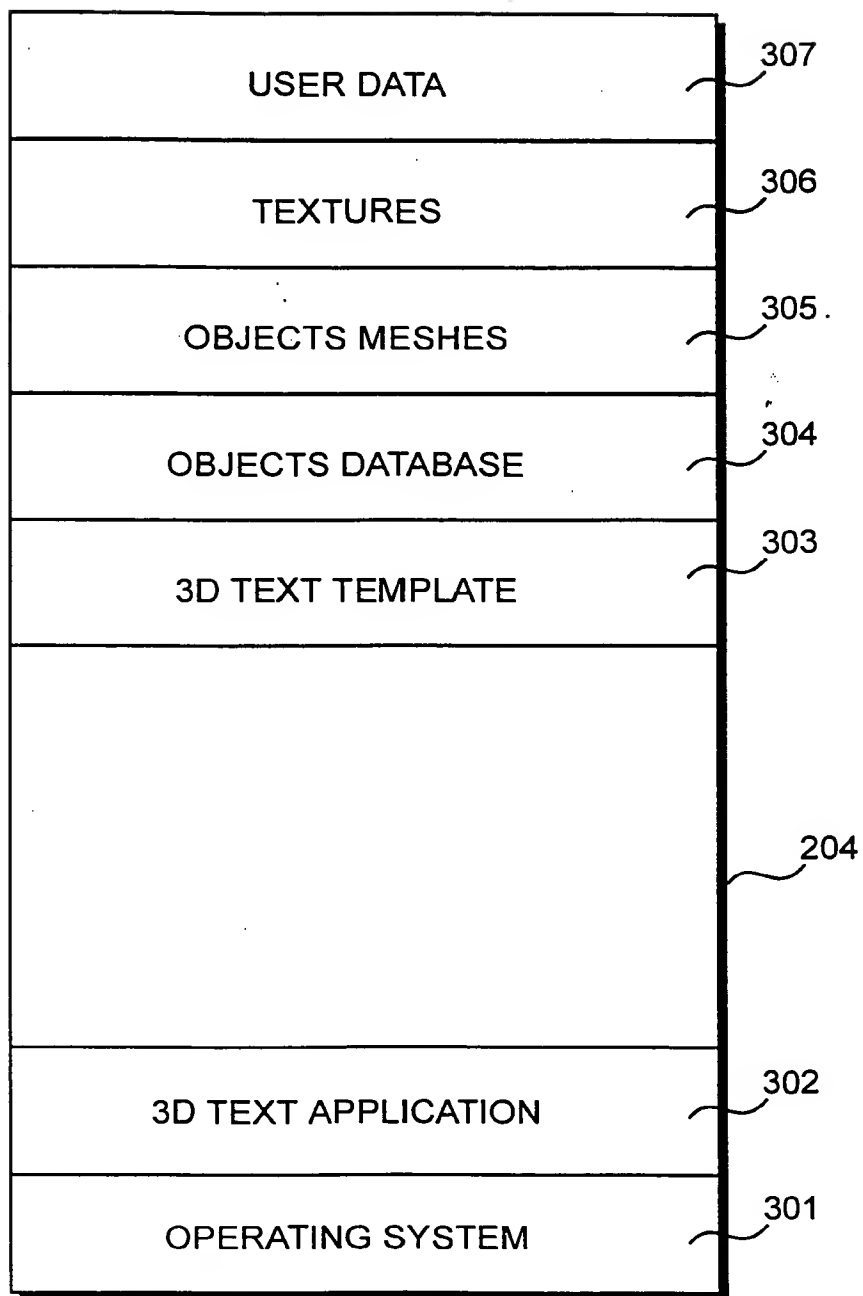



Figure 1

*Figure 2*


3/20

*Figure 3*


4/20

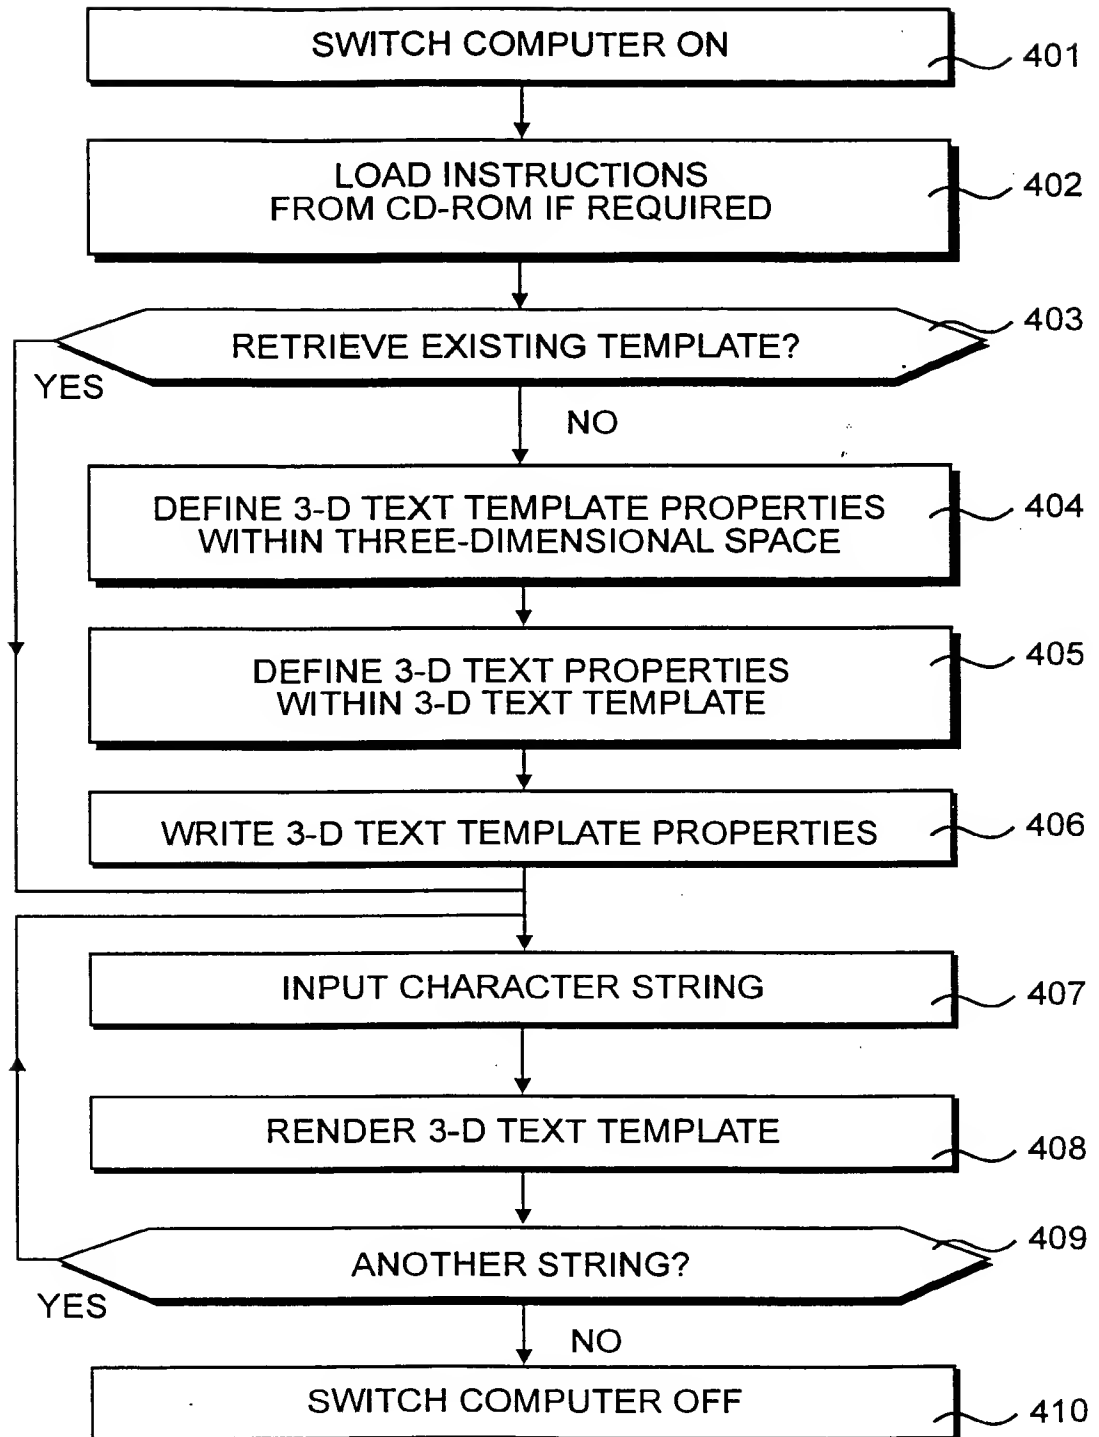*Figure 4*





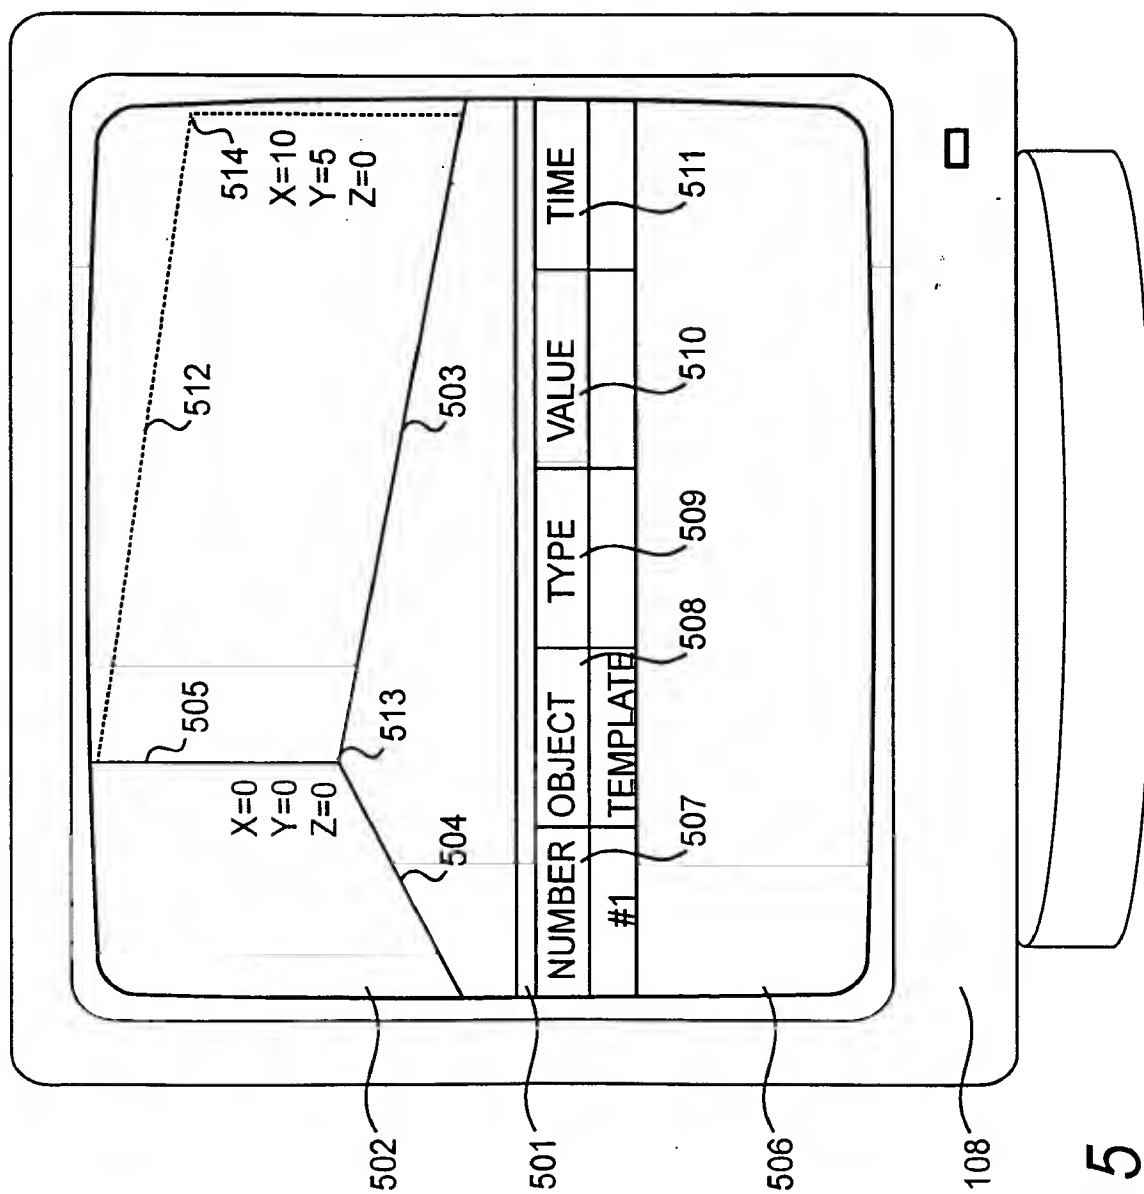



6/20

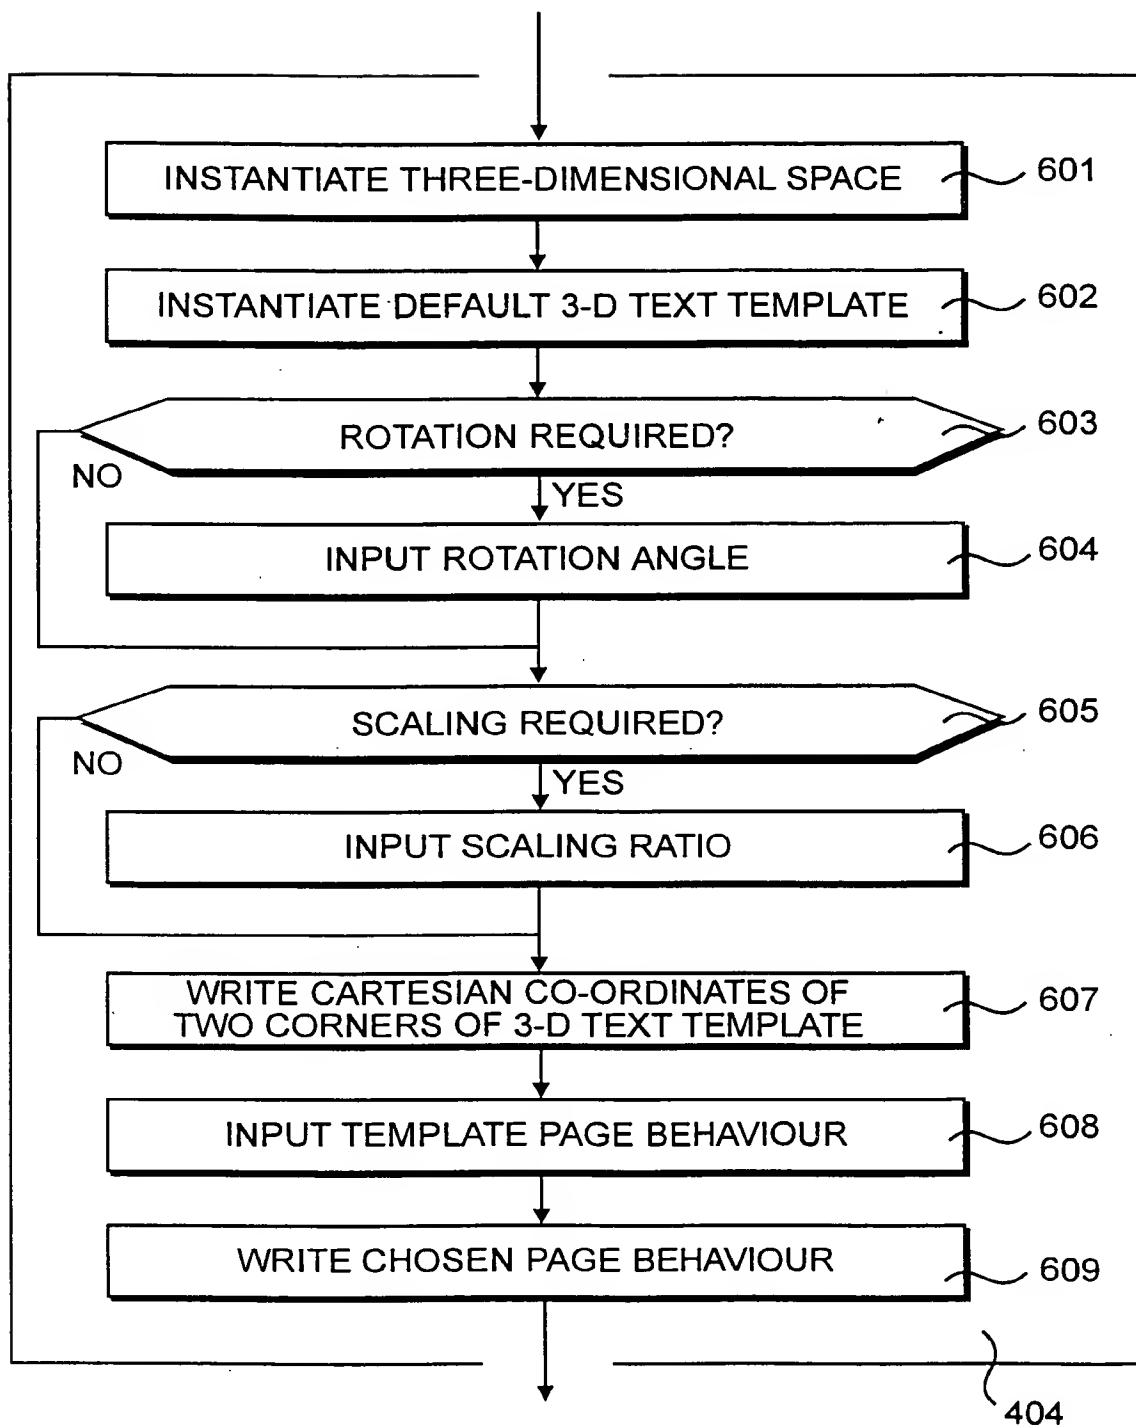*Figure 6*

7/20

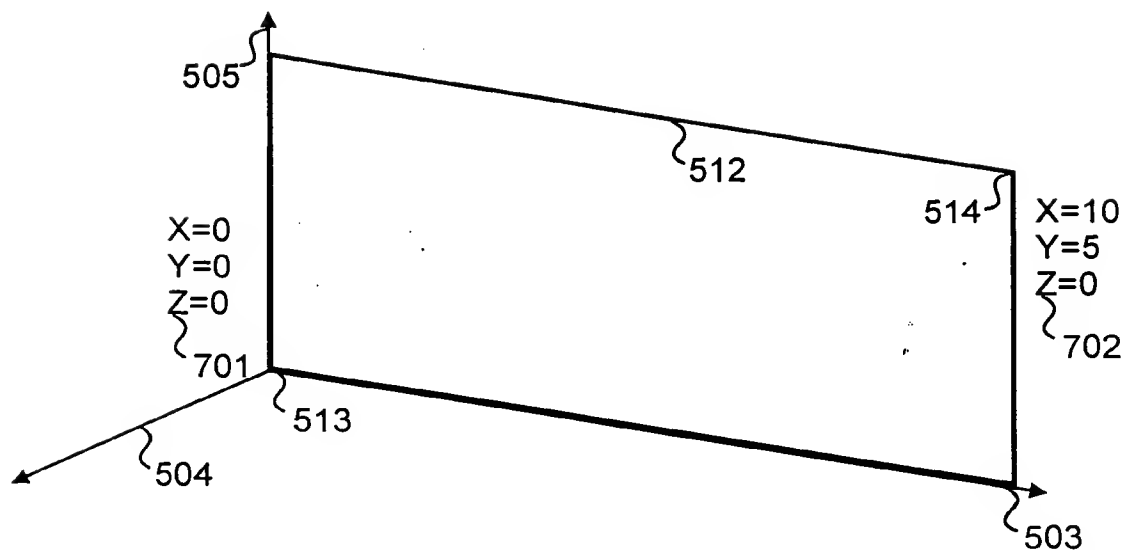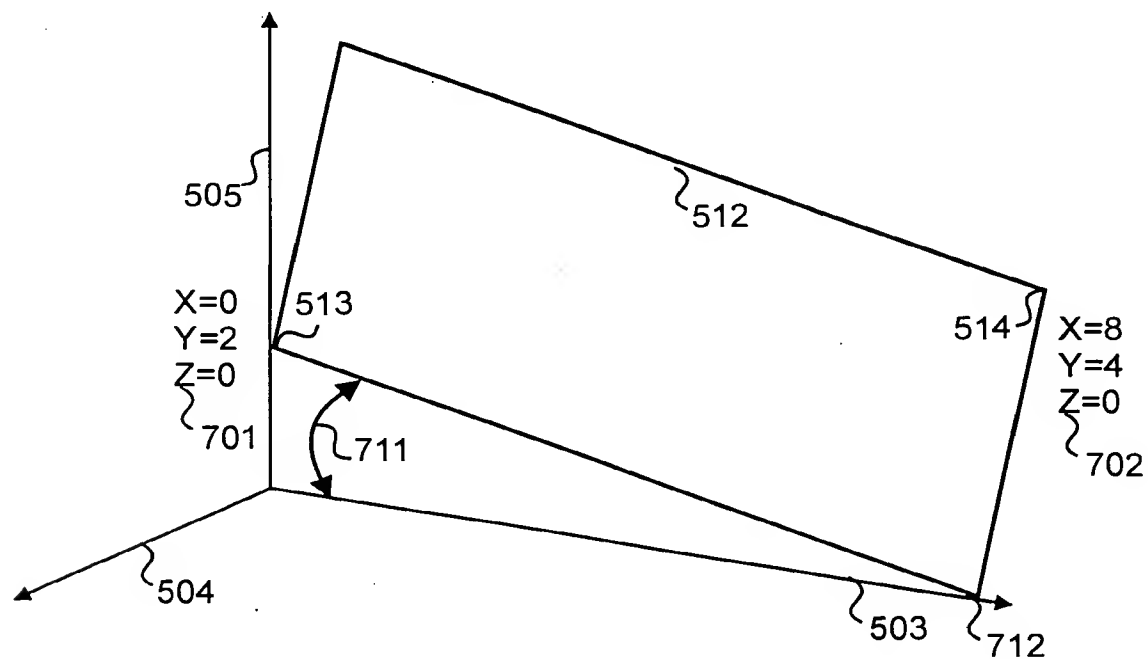*Figure 7A**Figure 7B*

8/20

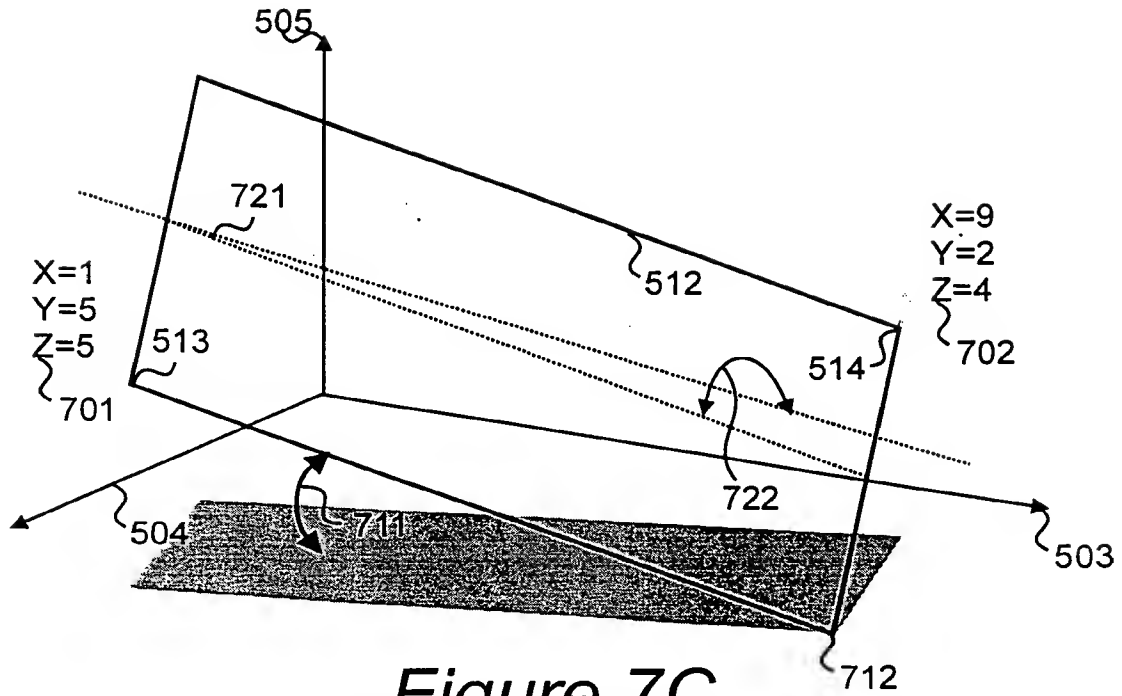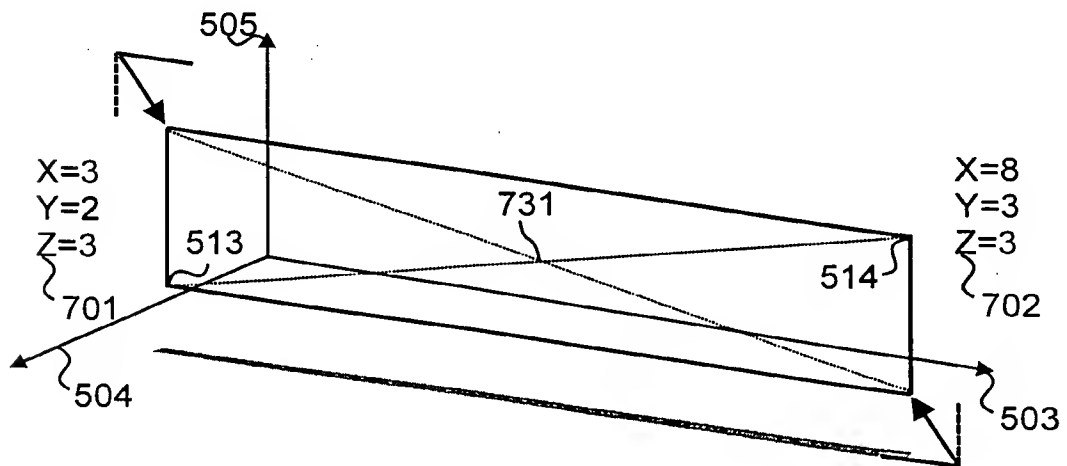*Figure 7C**Figure 7D*

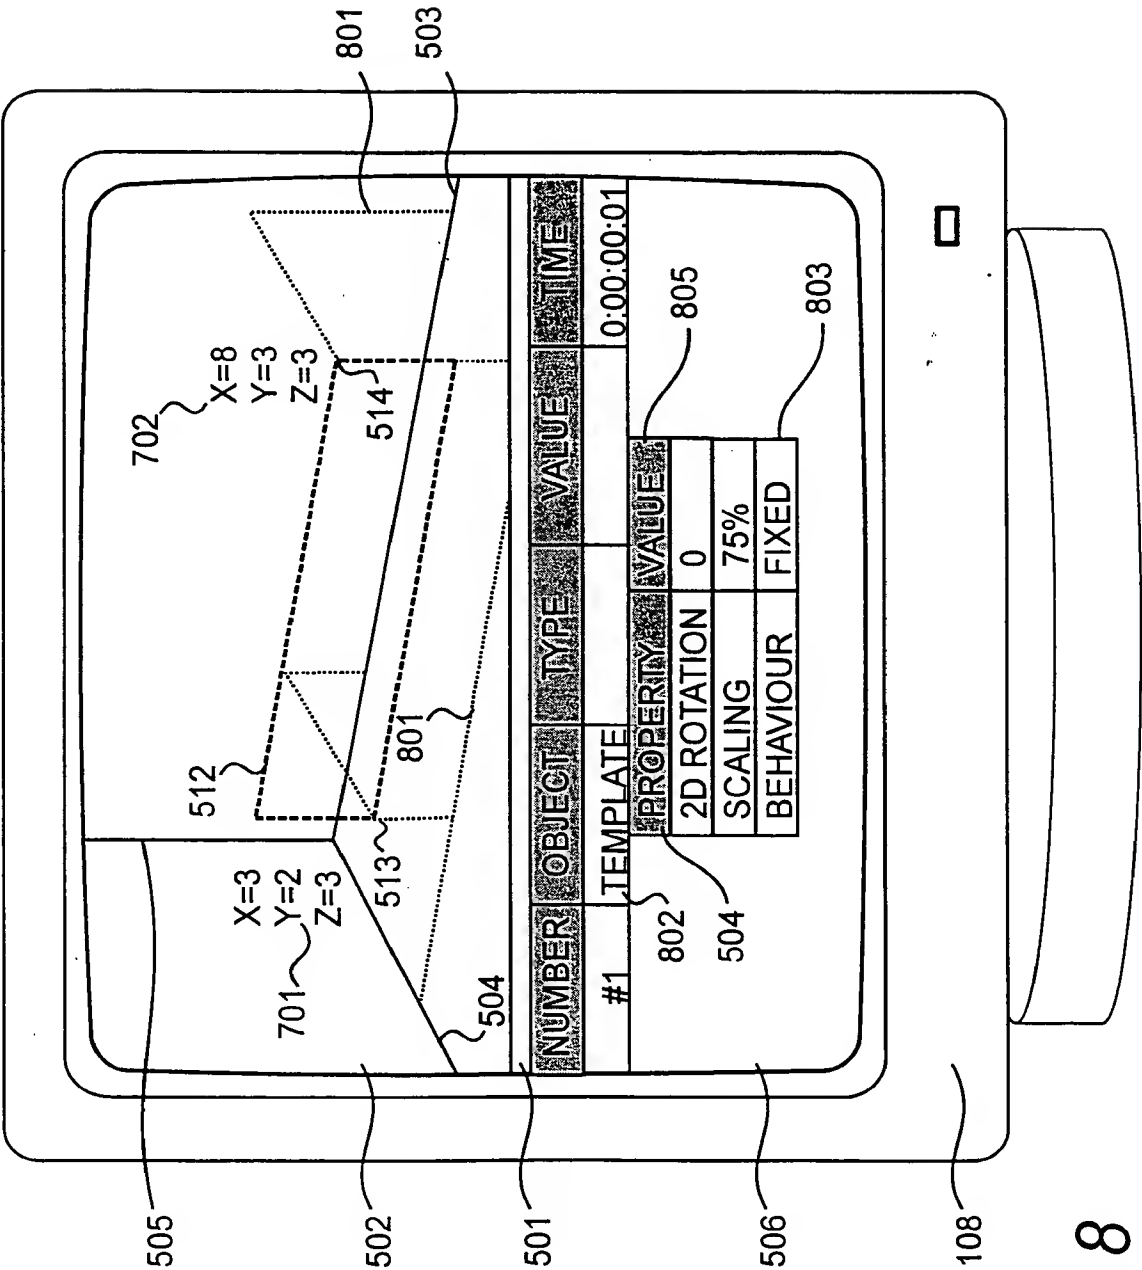
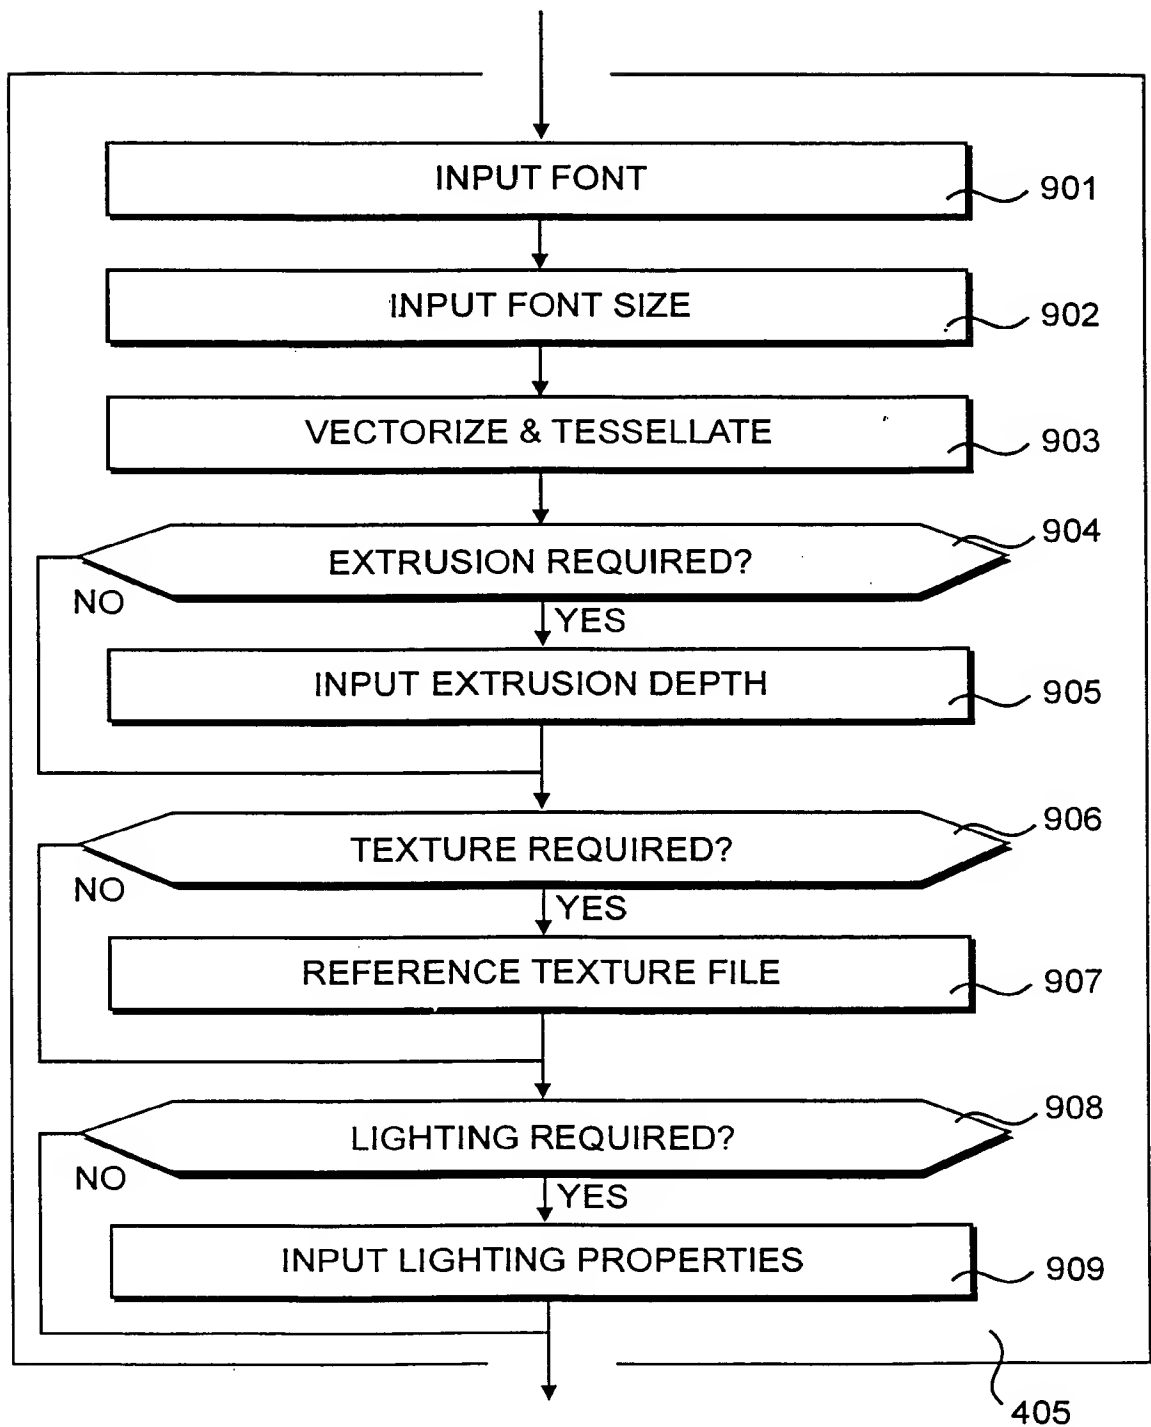
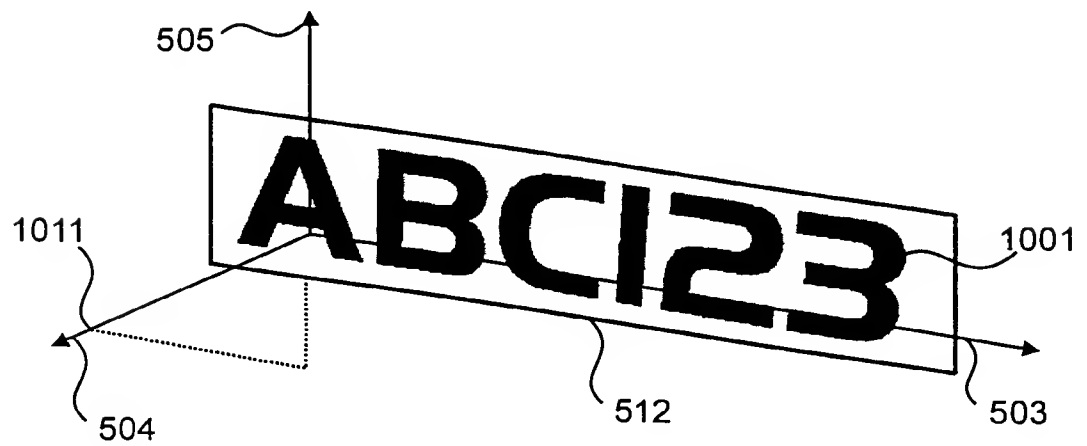


Figure 8


10/20

*Figure 9*


11/20

*Figure 10A**Figure 10B*

12/20

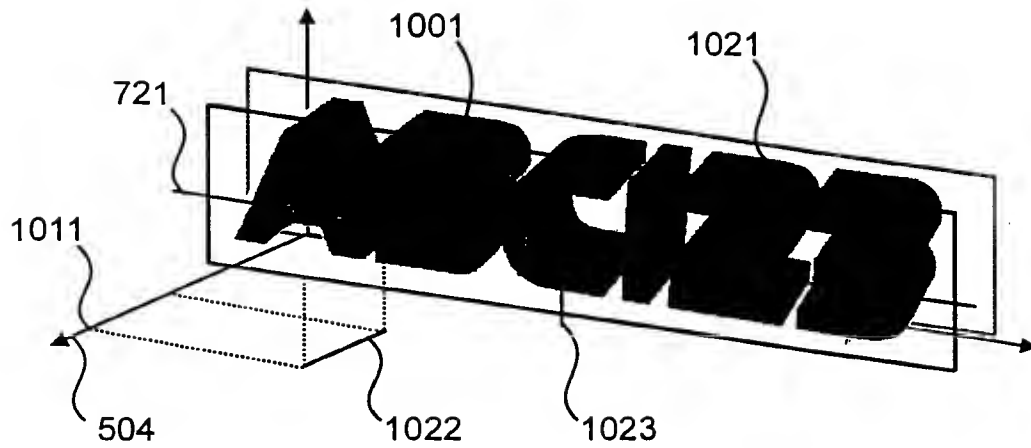

*Figure 10C*

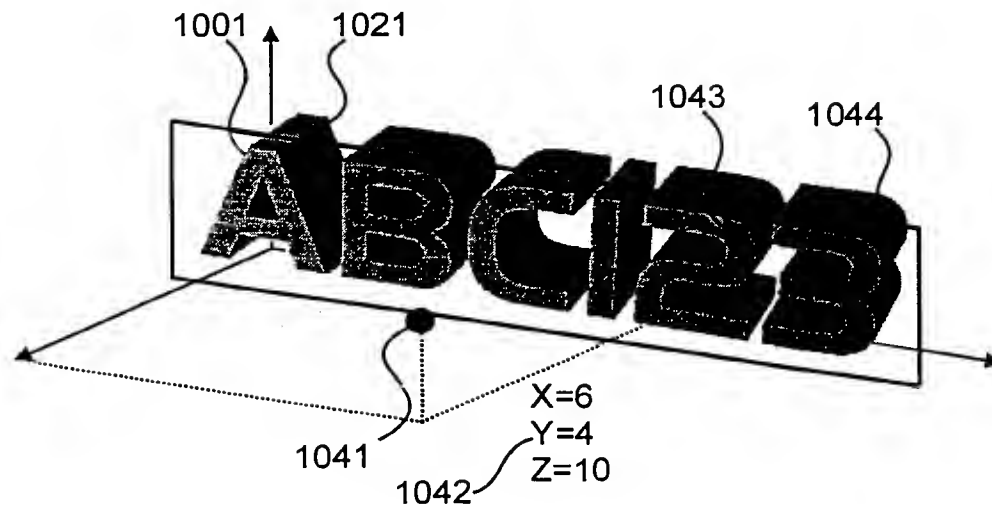

*Figure 10D*



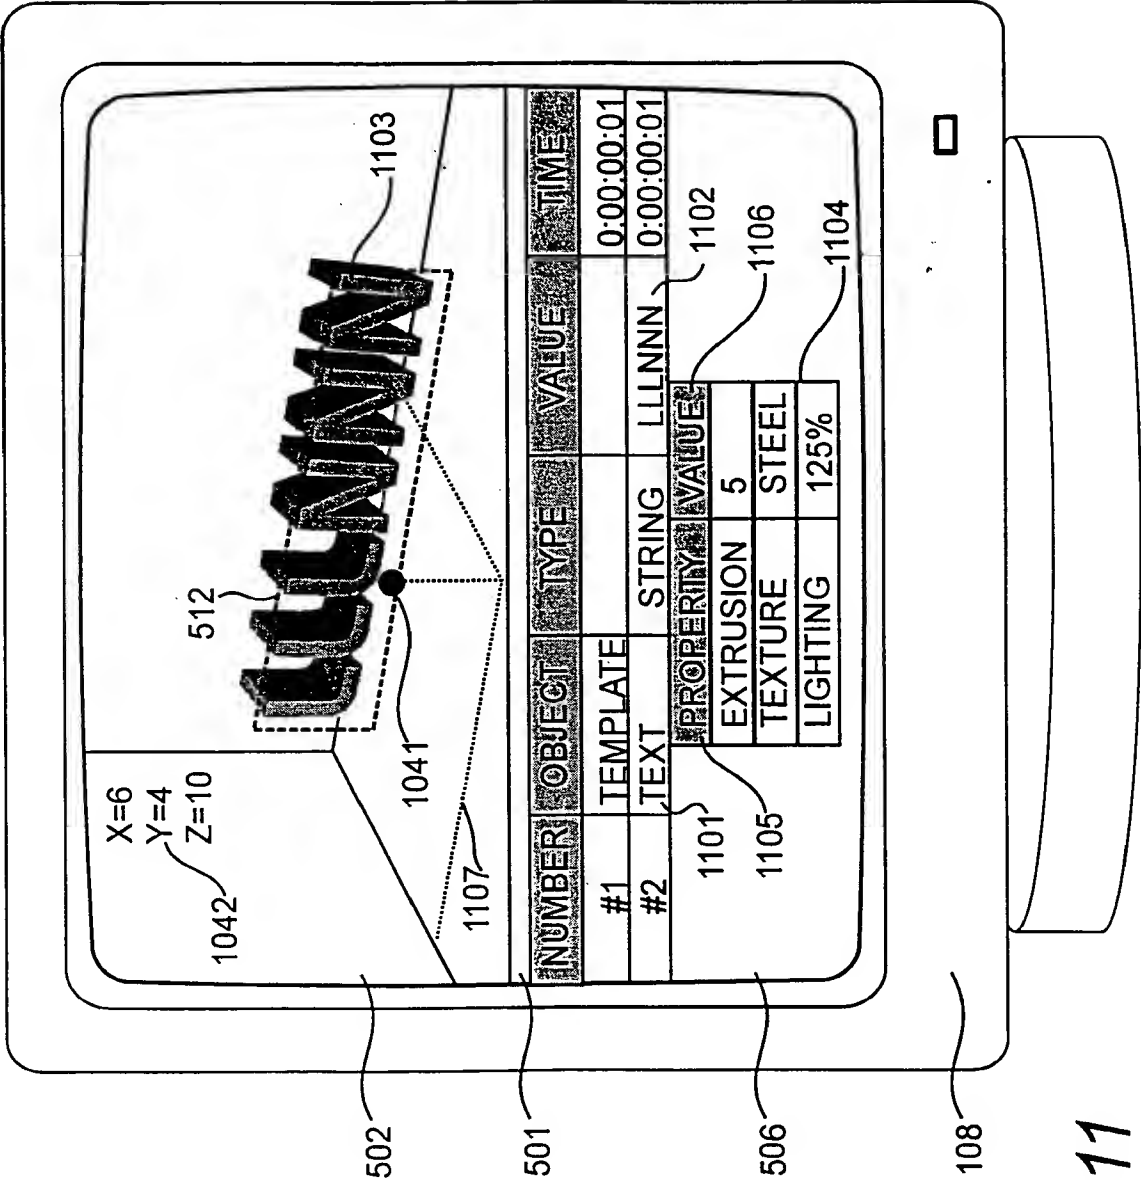
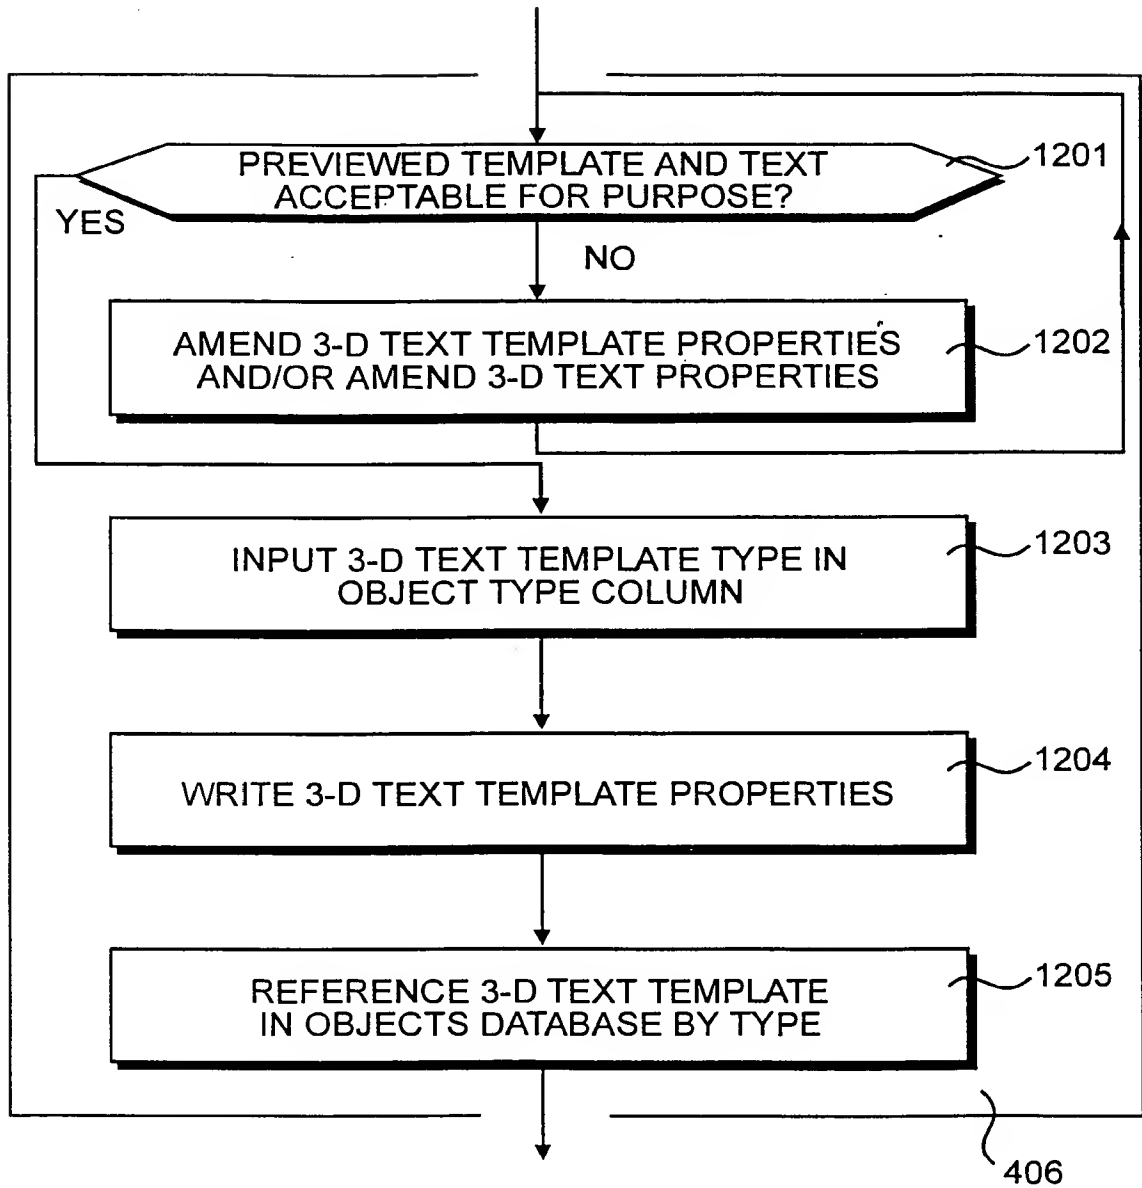


Figure 11

14/20

*Figure 12*

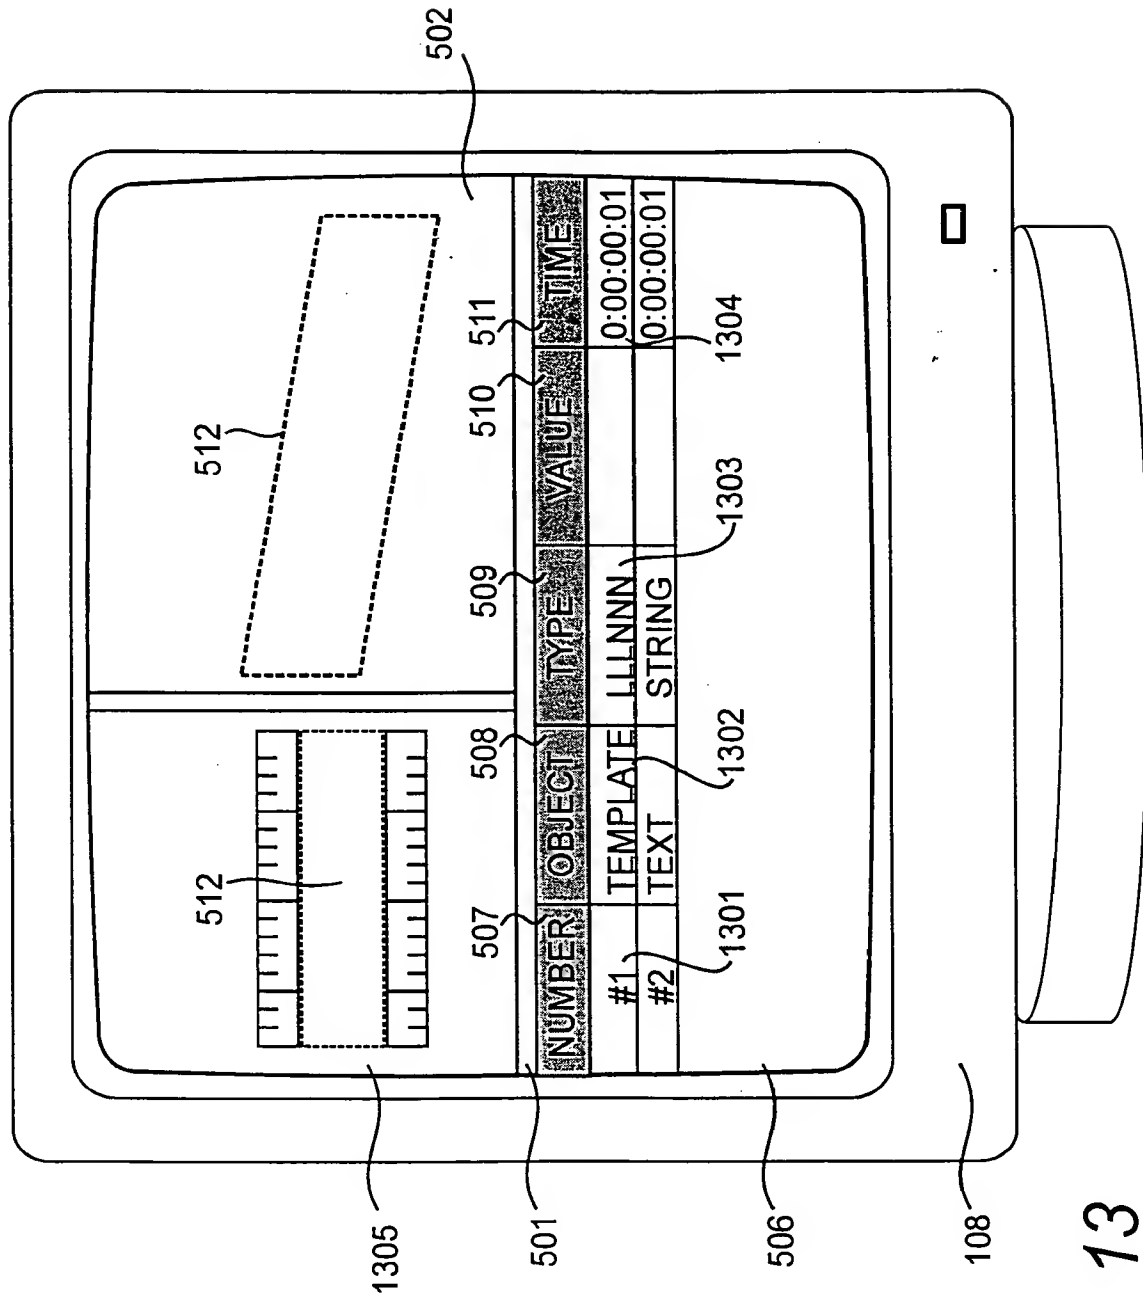


Figure 13

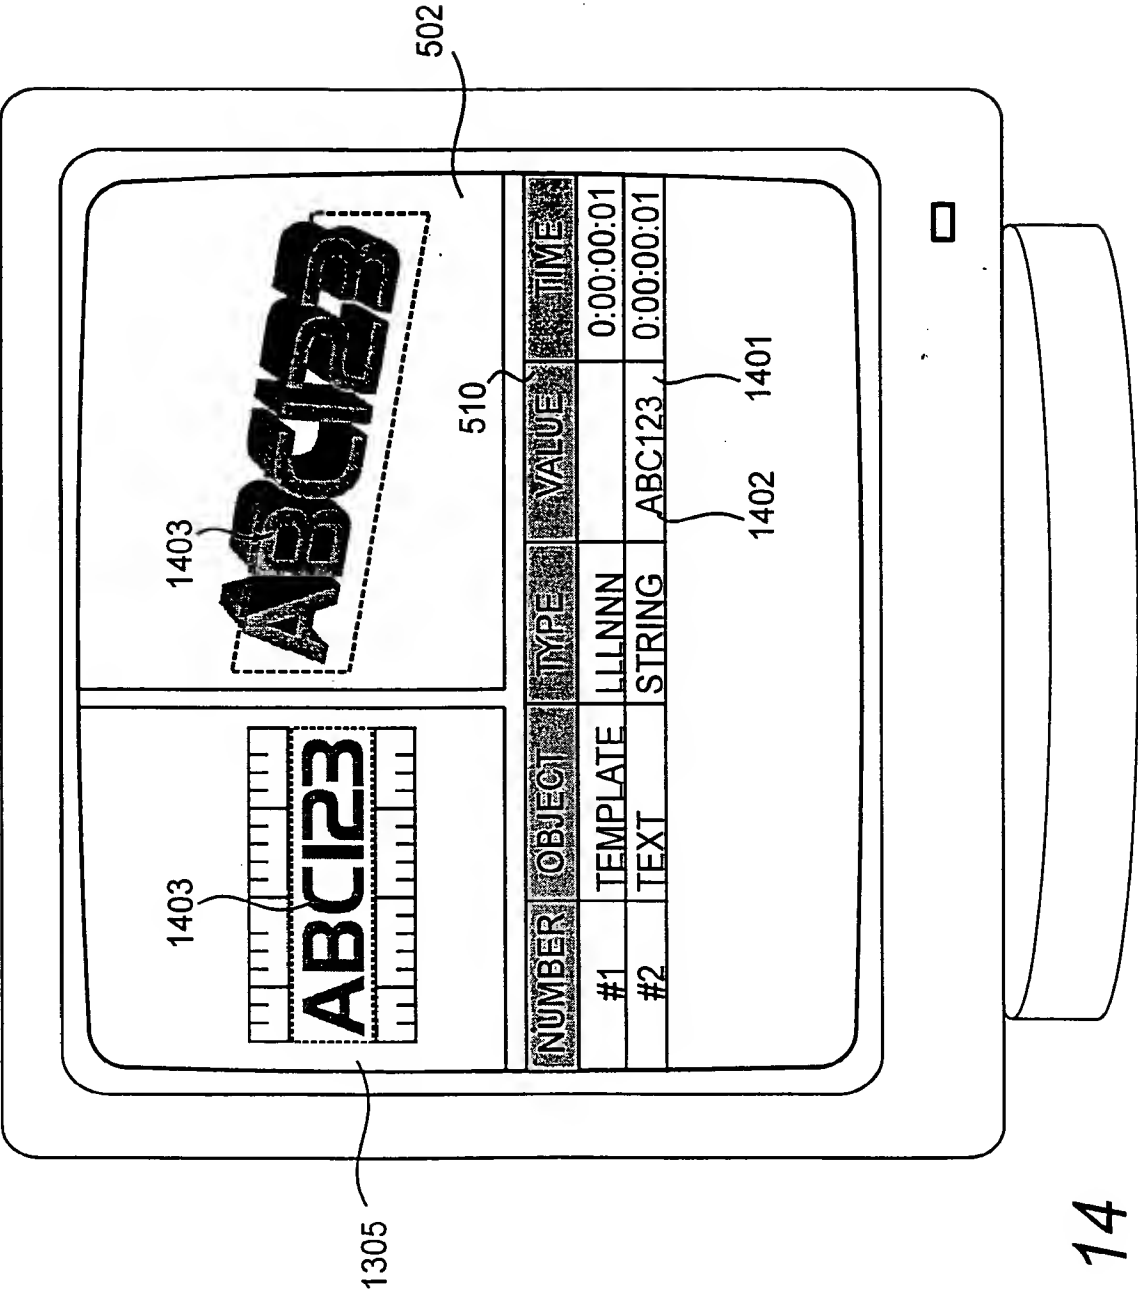


Figure 14

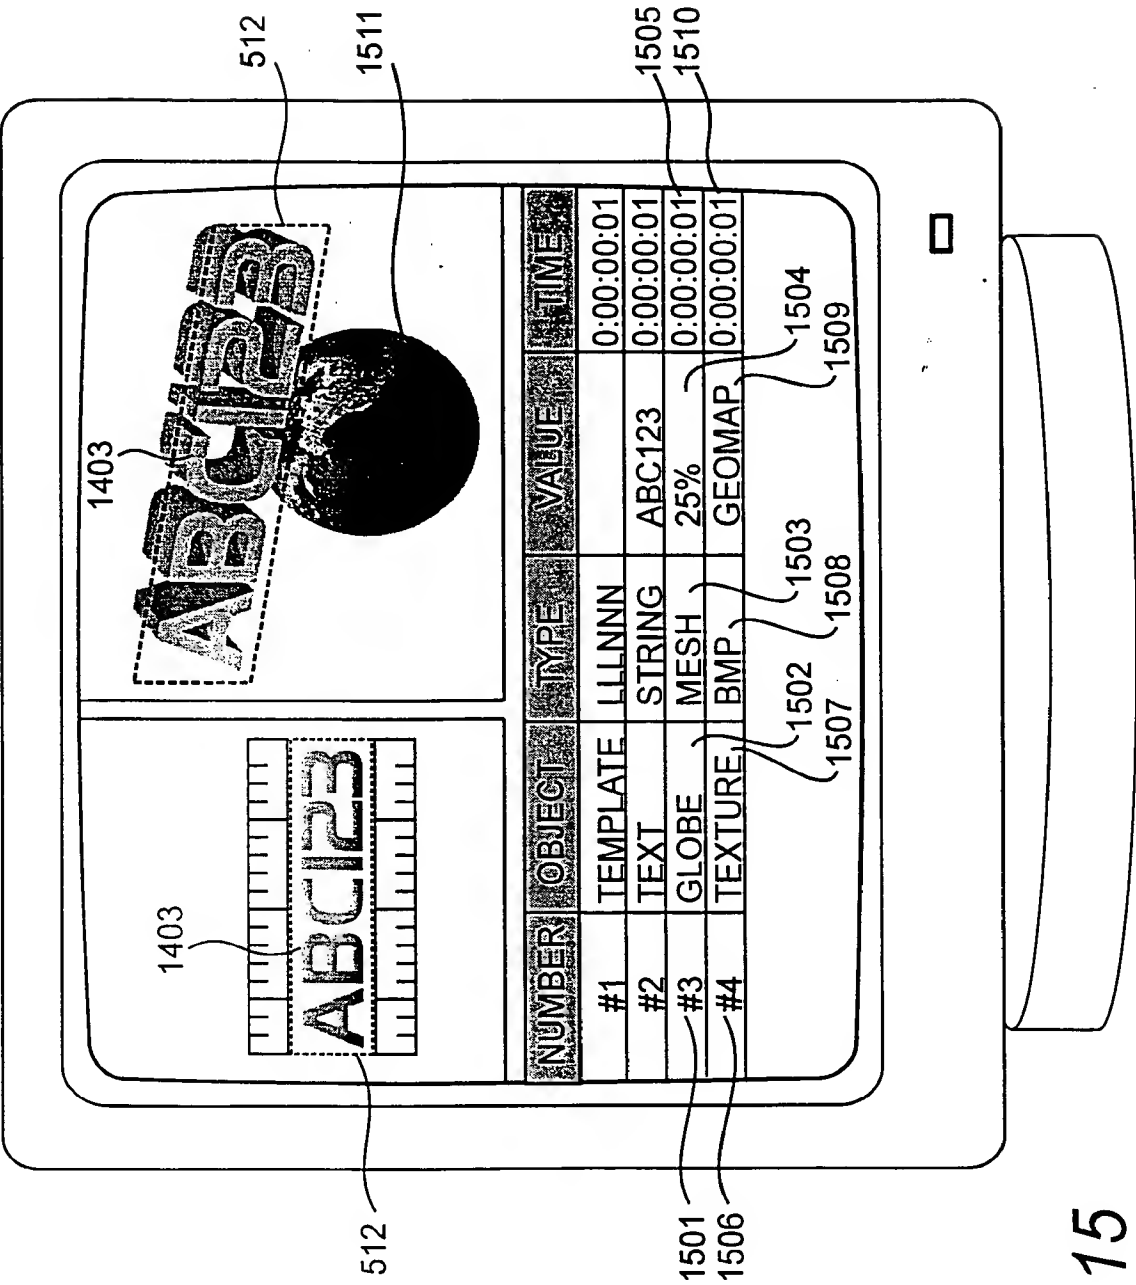


Figure 15

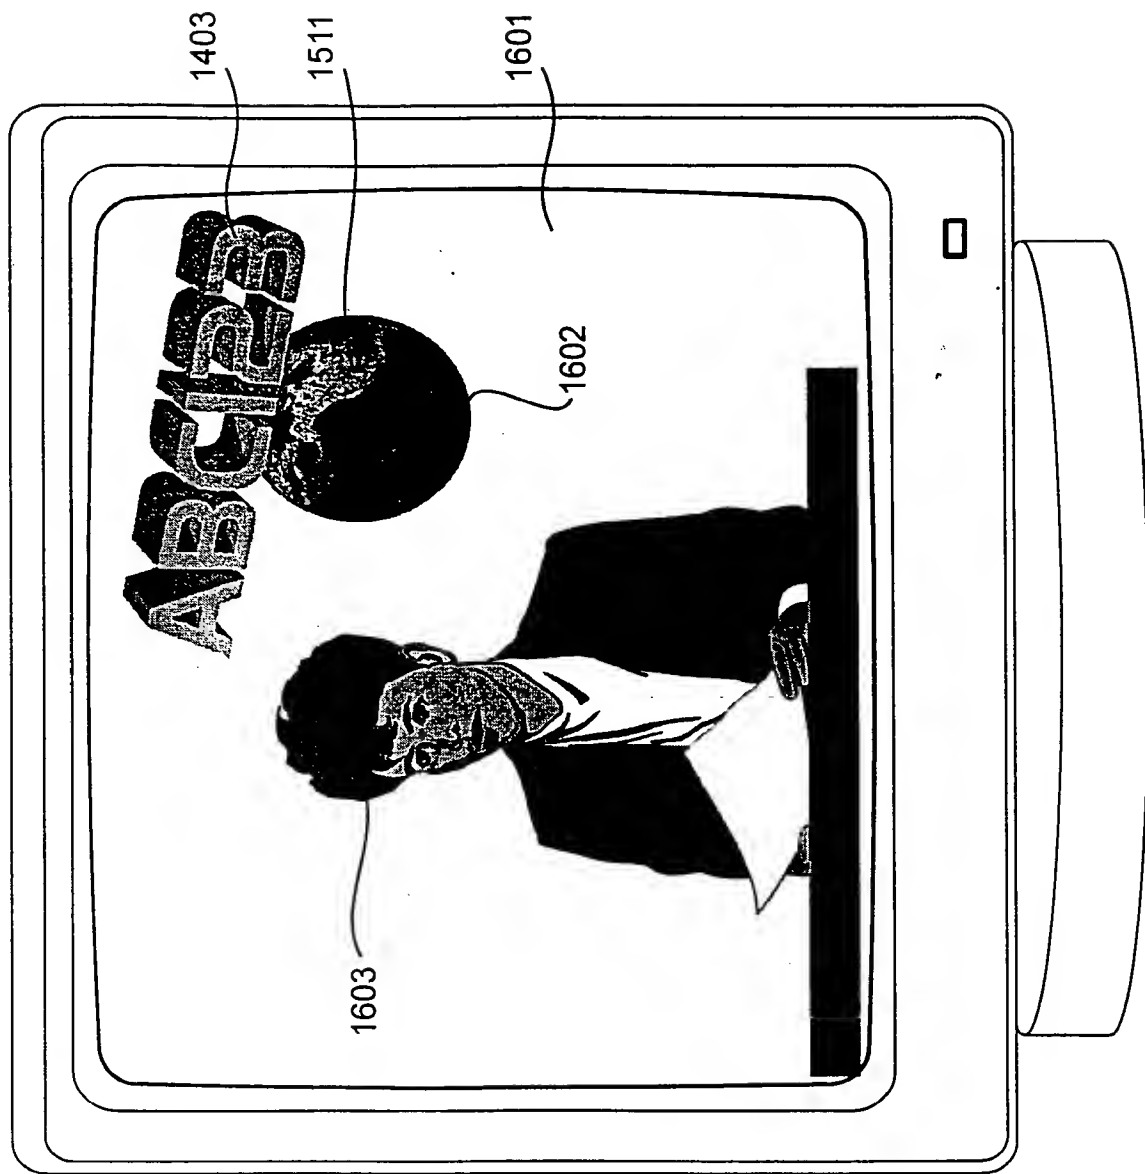


Figure 16

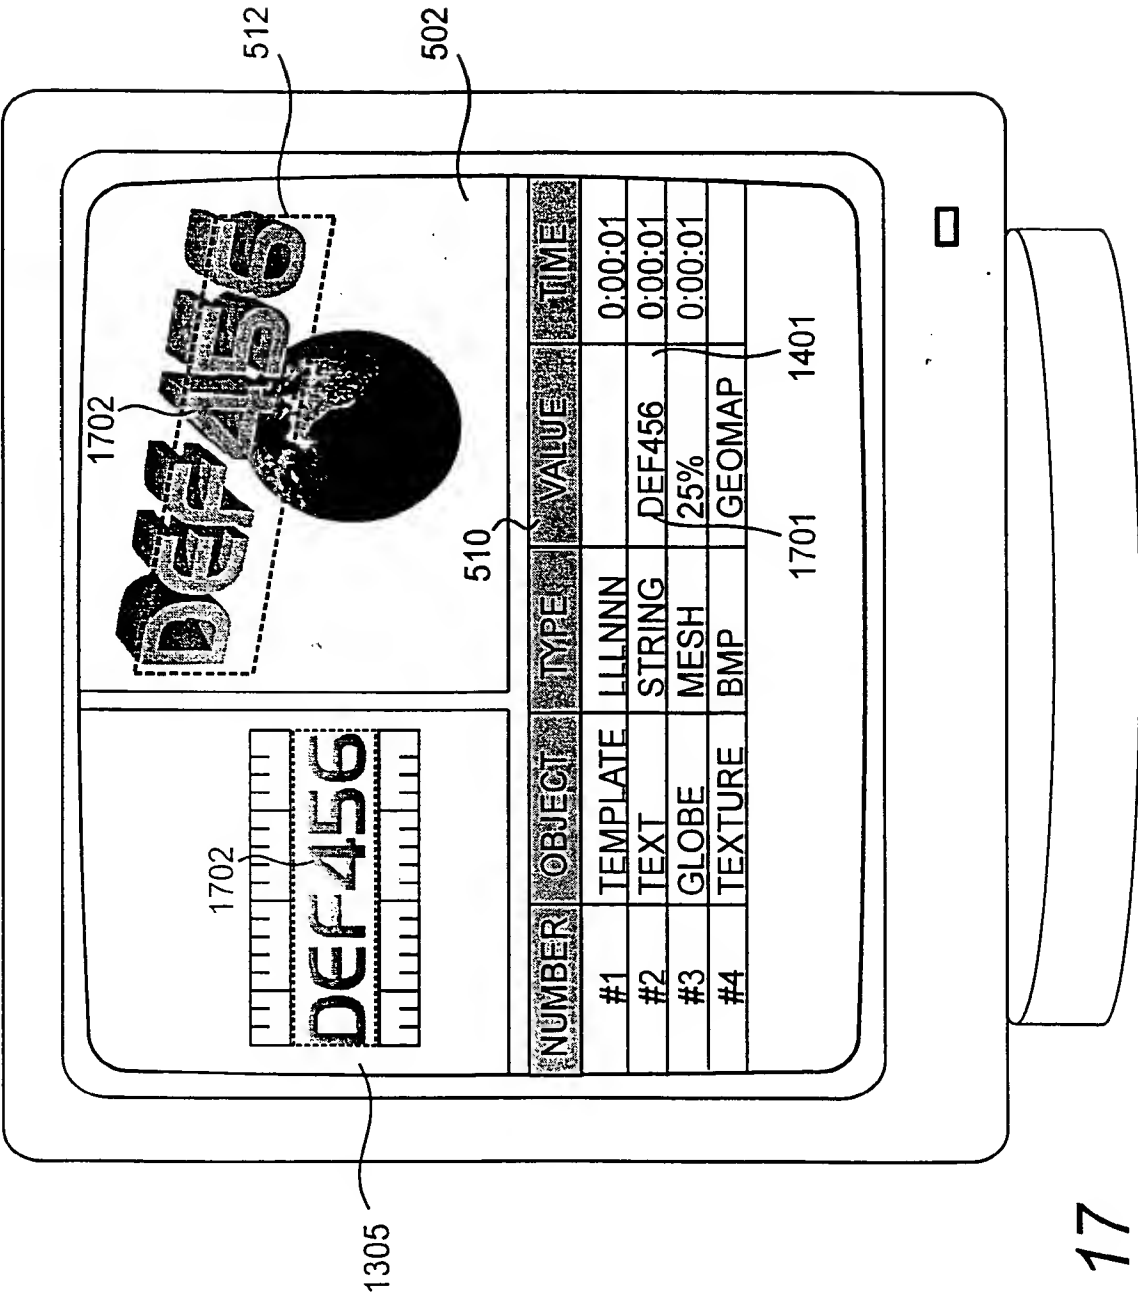
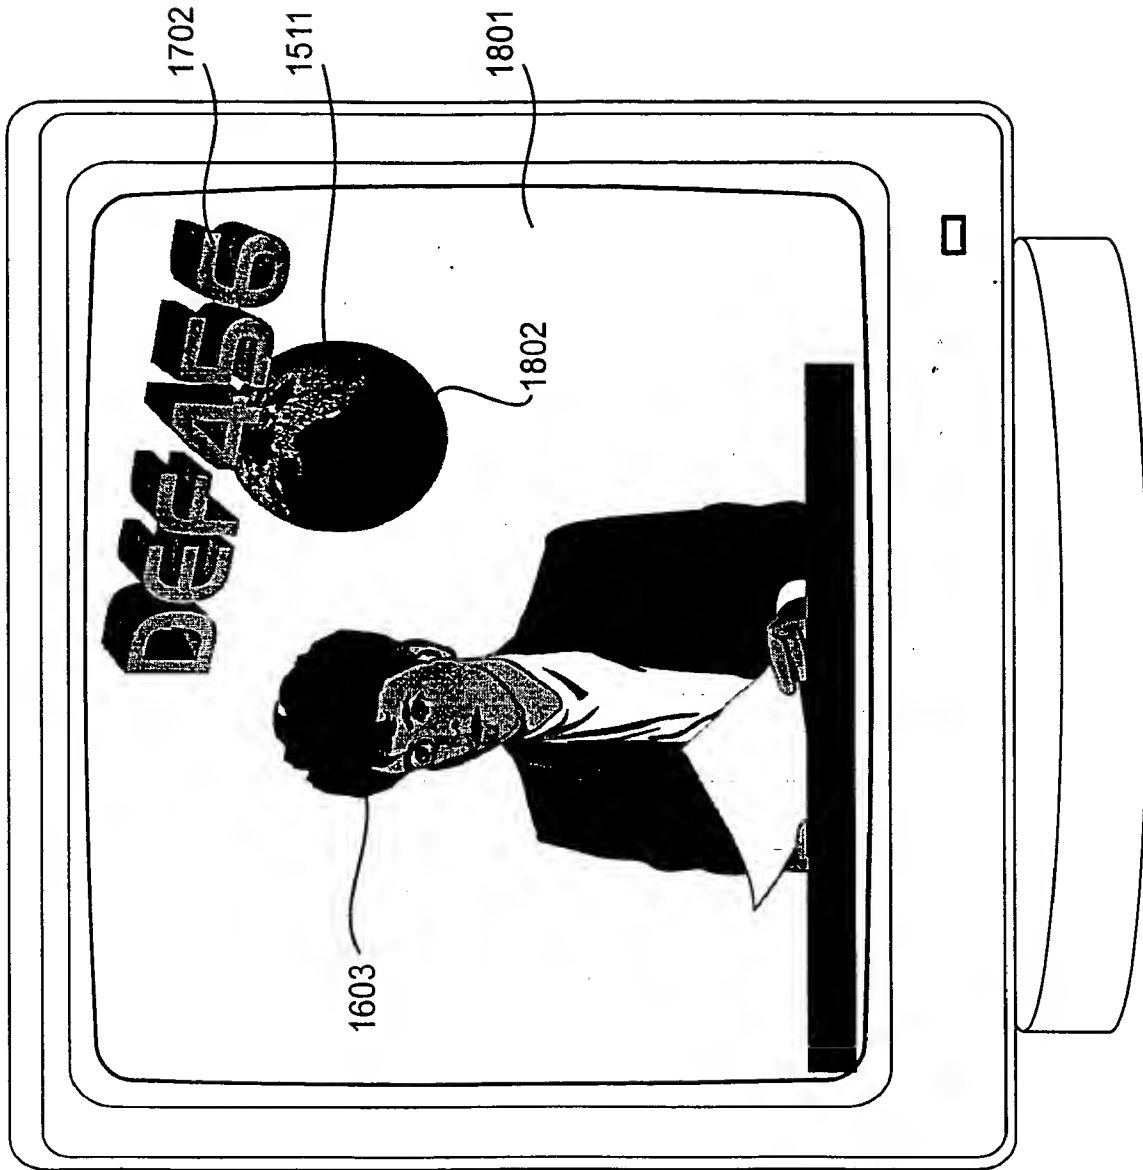


Figure 17

*Figure 18*